



Features

- Constant Current mode
- Input voltage 347V
- Protections: Open / Short / Over-Voltage / Over-Temperature
- PFC, flicker-free and isolated design
- Suitable for UL dry and damp location
- Programming output current with Wand / IOS APP
- 2Kv to 6Kv surge protection
- 3 in 1 Dimming (PWM, 1-10V, Resistance), Dim to 10%, 1%, or Off
- 5 years warranty
- Isolated Dimming





Input/Output Specifications

Mode	Parameter	<input type="checkbox"/> P3C1250S25DIL	<input type="checkbox"/> P3C1250S30DIL	<input type="checkbox"/> P3C1400S40DIL	<input type="checkbox"/> P3C1400S50DIL
INPUT	Voltage range	347 VAC ± 10%, 491 VDC			
	Frequency	50/60 Hz			
	Efficiency	78%	81%	82%	84%
	AC current	0.097A@347V	0.1A@347V	0.14@347V	0.17A@347V
OUTPUT	DC Voltage	15-55V			
	Current range	0.35 ~ 1.25A	0.35 ~ 1.25A	0.40 ~ 1.40A	0.40 ~ 1.40A
	Rated power	25W	30W	40W	50W
	RIPPLE & NOISE	200mVp-p			
<input type="checkbox"/> Optional	Auxiliary Wire	12V / 100mA			
Dimension (L x W x H) (mm)		<input type="checkbox"/> Case A (AM49) - 158 * 44 * 31 <input type="checkbox"/> Case B (AM111) - 133 * 63 * 30 <input type="checkbox"/> Case C (AM159) - 325 * 34 * 29			



Wire Diagram

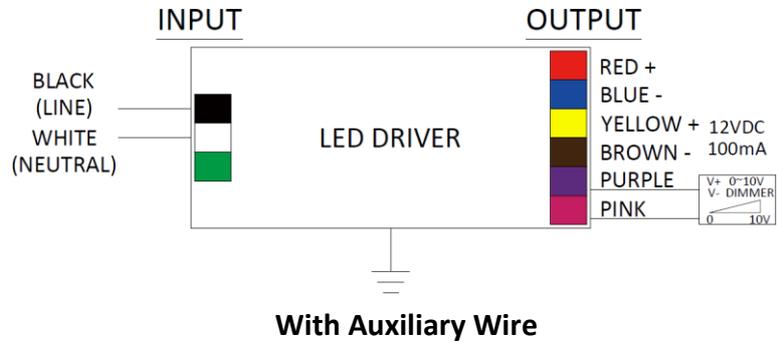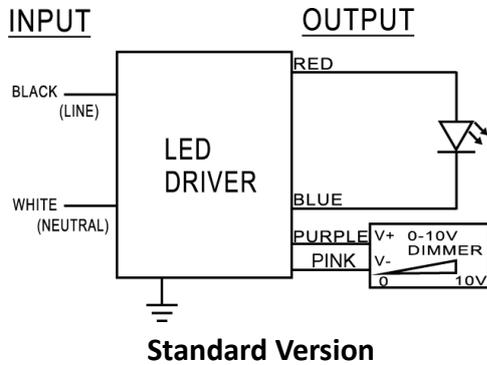

Maximum wiring distance (at full load) is 5.5meters. LED case should be grounded.


Standard Lead Wire Length

Wire Color	Inch	Cm
Black	6	15.2
White	6	15.2
Red	6	15.2
Blue	6	15.2
Purple	7.1	18
Pink	7.1	18
Brown (Optional)	6	15.2
Yellow(Optional)	6	15.2

* Connector Version not applied

Sensor Area

Enclosure

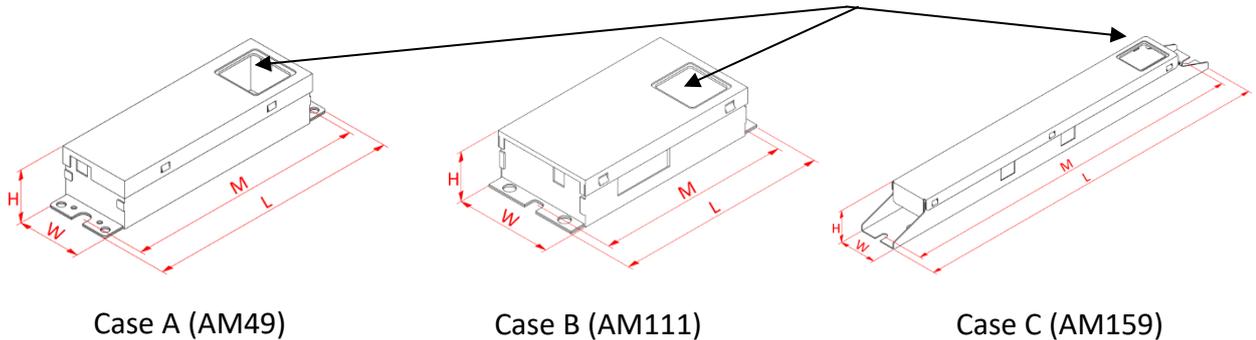

Enclosure	Inch	Cm	Inch	Cm	Inch	Cm
Length(L)	6.22	15.8	5.23	13.3	12.3	31.4
Width(W)	1.73	4.4	2.48	6.3	1.33	3.4
Height(H)	1.22	3.1	1.18	3	1.08	2.75
Mounting(M)	5.86	14.9	4.84	12.3	11.8	30.1



General Specifications

Parameter	Min.	Typ.	Max.	Notes
MTBF	-	100,000 Hours	-	@25°C ambient temperature
Lifespan Time	75,000 Hours	-	-	In the range of specification required by normal use of the power supply at ambient temperature 55°C
Cold Start	-	-	1.0s	@-40°C

Protection

Parameter	Description
Over Voltage	Output current decade mode, recovers automatically after fault condition is removed.
Short Circuit	Hiccup mode, recovers automatically after fault condition is removed.
<input type="checkbox"/> Over Temperature (Optional)*	Brightness dims to 25% when T-case > 80°C for overheat protection, and auto-recovers to 100% when T-case drops below 80°C

* The factory default setting does not include over temperature protection.

Environmental Specifications


Parameter	Min.	Typ.	Max.	Notes
Operation Temperature	-40°C	-	50°C	
Storage Temperature	-40°C	-	80°C	
Humidity	10%	-	90%	
T-Case Temperature	-	-	90°C	

Safety and EMC Compliance


Safety Standards	Withstand Voltage	Isolation Resistance	EMC Standards	
			EMI	EMS
UL 8750	I/P-O/P: 2.0K Vac I/P-FG: 2.0K Vac O/P-FG: 0.5K Vac	I/P-O/P: I/P-FG: O/P-FG: 100Mohm/500VDC	FCC Part 15 class A UL8750 CSA C22.2 No. 250.13-14	FCC Part 15 class A UL 8750




I_{out} vs V_{out} Curve

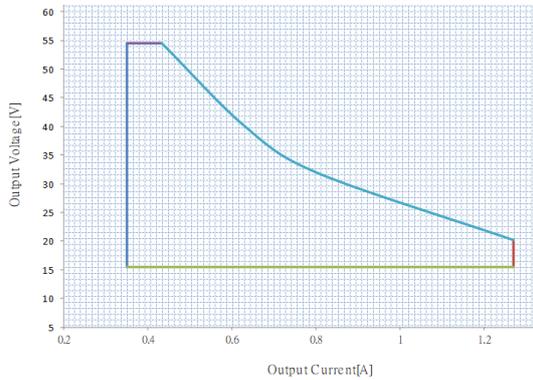


P3C1250S25D

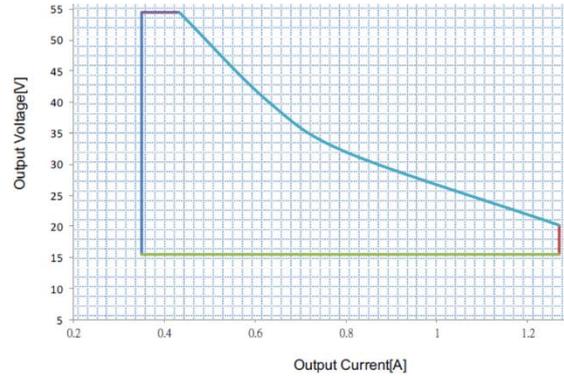

P3C1250S30D

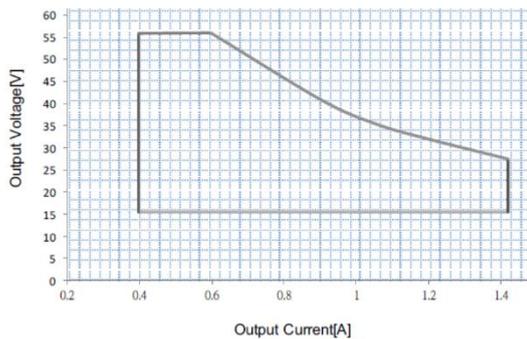

P3C1400S40D

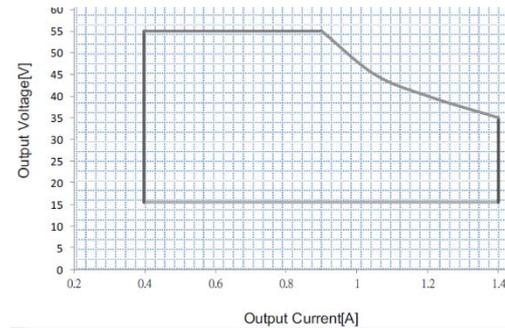

P3C1400S50D

Data is based upon tests performed by Antron Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.



Programmable Tool

- Put the programmable wand above the NFC mark of the driver to start programming
- Download the software from www.antron.com.tw



Programmable Driver Options (App Note)

All programmable drivers accept a 16-bit hexadecimal code to program the output current (Iout) of the driver. The Iout programming codes are documented in the computer based-programming software (ST-TOOLS.exe) or from the driver's IOUTCODE.pdf file. The Locations below 0, 1, 2, 3 contain the basic code for a specific output current value (example 84 03 **00** 01 = 1050 mA for PAC1400S50D).

Location	0	1	2	3	
Value	00	00	00	00	

For drivers containing Revision C of their firmware (contact factory for date code of implementation), it is also possible to adjust the minimum dimming level and the dimming speed. This adjustment is made by modifying location 2 of the programming code while keeping the other locations set for the desired output current. Specifically, the location 2 values are defined as:

- **00** => Dim to 1%, Speed \leq 1.0 sec
- **01** => Dim-to-OFF, Speed \leq 1.0 sec
- **02** => Dim to 10%, Speed \leq 1.0 sec
- **03** => Dim to 1%, Speed \geq 2.5 sec
- **04** => Dim-to-OFF, Speed \geq 2.5 sec
- **05** => Dim to 10%, Speed \geq 2.5 sec

As an example, if the programming code value of 84 03 00 01 is programmed, the output current will be 1050 mA, and the driver will dim to 1% and the dimming speed will be \leq 1.0 sec. If the programming code of 84 03 04 01 is programmed, the output current will be 1050 mA, and the driver will dim to off and the dimming speed will be \geq 2.5 sec.

Data is based upon tests performed by Antron Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.



Revision History

Change date	Description of Change		
	Item	From	To
2025/02/05	1. Model name 2. Over Temperature	1. NFC 347V Series 25~50W 2. /	1. NFC 347V Series 25/30/40/50W 2. Updated
2025/02/07	1. Enclosure	1. /	1. Update format


HOW TO USE NFC PROGRAMMING

1. Downloading the App

- (1.) Open the **App Store** on your Apple device.
- (2.) Search for **Antron LED Driver App**.
- (3.) Tap **Download** and wait for the app to install.


2. App Setup and Operation

- (1.) **Launch the App**
Open the app by tapping the Antron LED Driver icon on your home screen.
- (2.) **Ensure NFC is Enabled**
Verify that the NFC functionality on your device is turned on.
- (3.) **Scan the Driver**
Place your device's NFC area near the tag's NFC logo to start scanning.
- (4.) **Automatic Detection**
Once detected, the app will navigate directly to the corresponding operation interface.

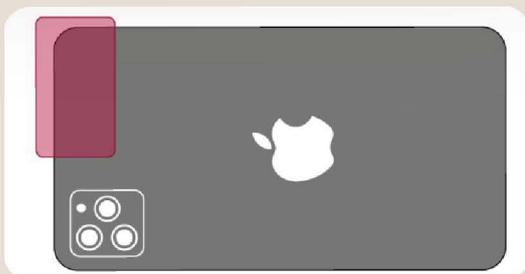

3. Configuring Driver Settings

- (1.) **Current Settings**
In the Current field, input the desired current value.
The maximum and minimum current limits will be displayed below for reference.
- (2.) **Dimming Speed**
Select either Fast or Slow based on your preference.

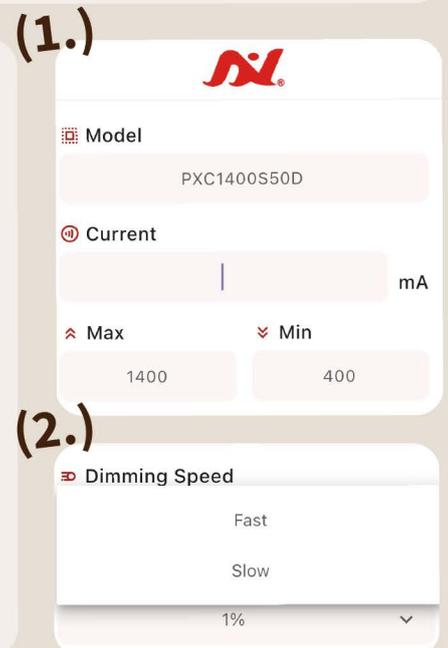

(3.)

 Dimming Level

1%

OFF

10%

(4.)

 Dimming Curve

Linear

Log

(5.)

Completed



OK

(3.) Dimming Level

Adjust the minimum output power via the dimmer to 1%, 10%, or off, according to your requirements.

(4.) Dimming Curve

Choose between Linear or Log dimming for your application.

(5.) Apply Settings

Once all the desired settings are selected, tap Write and bring your device's NFC area close to the LED Driver's NFC logo to initiate programming. When the screen displays Completed, the scanning and configuration are finished.

4. Troubleshooting

(1.) Unable to Detect the Driver

Ensure NFC is enabled on your Apple device.

Check that the NFC tag is clean and free of obstructions.

(2.) Settings Not Applying

Confirm that the device is properly scanned.

Confirm that the input current value is within the product's maximum and minimum limits.

Retry applying settings and ensure you tap Write.

(3.) App Crashing or Freezing

Restart the app or your device.

Ensure you're using the latest app version.

(4.) Contact Support

For further assistance, contact our support team:

Email: info@antron.com.tw