




Model Name	EMLEDS10-1555-7.2CHPEXLA
Output Model	Constant Power
Input Voltage	120-277 Vac
Input Frequency	50/60 Hz
Dimming	N/A
Surge Rating	3KV
Warranty	5 Years TC $\leq 60^{\circ}\text{C}$ 3 Years TC $\leq 66^{\circ}\text{C}$

Product Specification



Output Power (W)	Output Voltage (V)	Output Current (mA)	Operating Duration Time	Operating Temp. ($^{\circ}\text{C}$)	Battery Voltage (V)	Battery Charge Current (mA)	Battery Charge Time	Input Power	Input Current (mA)
Max. 10	15-55	660-180	Min. 90min	-20-55	7.2	Max. 500	Max. 24Hrs	Max. 10	Max. 140

Wire Diagram

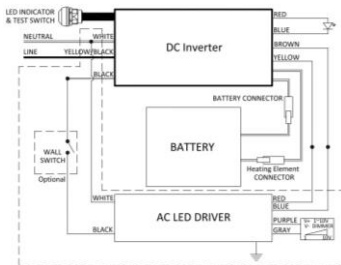


Maximum Wiring Distance (at full load) is 18AWG/18Feet

Maximum Battery Connector Wiring Distance is 50Feet

Lead Length	Inch	Cm
Black	5.9	15
White	5.9	15
Yellow/Black	5.9	15
Red	5.9	15
Blue	5.9	15
Yellow	5.9	15
Brown	5.9	15
Test Switch	7.08	18
LED Indicator	23.62	60

Enclosure

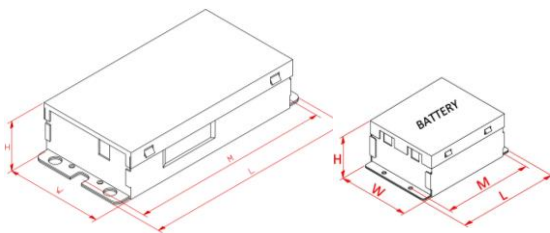

AM111

AM136

	DC Inverter			Battery	
	Inch	Cm		Inch	Cm
Enclosure			Enclosure		
Length(L)	5.23	13.3	Length(L)	3.35	8.5
Width(W)	2.48	6.3	Width(W)	2.44	6.2
Height(H)	1.18	3	Height(H)	1.38	3.5
Mounting(M)	4.84	12.3	Mounting(M)	3.07	7.8