



# Constant Power Emergency LED Pack




<b>Model Name</b>	MEMLEDS10-1555-7.2CHPEXLA
<b>Output Model</b>	Constant Power
<b>Input Voltage</b>	120-347 Vac
<b>Input Frequency</b>	50/60 Hz
<b>Dimming</b>	N/A
<b>Surge Rating</b>	3KV
<b>Warranty</b>	5 Years TC $\leq$ 60°C 3 Years TC $\leq$ 66°C

## Product Specification



Output Power (W)	Output Voltage (V)	Output Current (mA)	Operating Duration Time	Operating Temp. (°C)	Battery Voltage (V)	Battery Charge Current (mA)	Battery Charge Time	Input Power	Input Current (mA)
Max. 10	15-55	660-180	Min. 90min	-20-55	7.2	Max. 500	Max. 24Hrs	Max. 10	Max. 140

## Wire Diagram

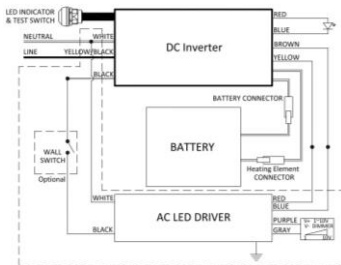


Maximum Wiring Distance (at full load) is 18AWG/18Feet

Maximum Battery Connector Wiring Distance is 50Feet

Lead Length	Inch	Cm
Black	5.9	15
White	5.9	15
Yellow/Black	5.9	15
Red	5.9	15
Blue	5.9	15
Yellow	5.9	15
Brown	5.9	15
Test Switch	7.08	18
LED Indicator	23.62	60

## Enclosure

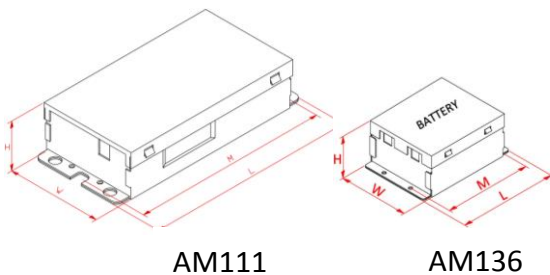

AM111

AM136

	DC Inverter			Battery	
	Inch	Cm		Inch	Cm
Enclosure			Enclosure		
Length(L)	5.23	13.3	Length(L)	3.35	8.5
Width(W)	2.48	6.3	Width(W)	2.44	6.2
Height(H)	1.18	3	Height(H)	1.38	3.5
Mounting(M)	4.84	12.3	Mounting(M)	3.07	7.8