



# Constant Current Emergency LED Pack




<b>Model Name</b>	MEMLEDS8-80130-6.4CHXL
<b>Output Model</b>	Constant Current
<b>Input Voltage</b>	120-347 Vac
<b>Input Frequency</b>	50/60 Hz
<b>Dimming</b>	N/A
<b>Surge Rating</b>	3KV
<b>Warranty</b>	5 Years TC $\leq 60^{\circ}\text{C}$ 3 Years TC $\leq 66^{\circ}\text{C}$

## Product Specification




Output Power (W)	Output Voltage (V)	Output Current (mA)	Operating Duration Time	Operating Temp. ( $^{\circ}\text{C}$ )	Battery Voltage (V)	Battery Charge Current (mA)	Battery Charge Time	Input Power (W)	Input Current (mA)
Max. 8	80-130	60	Min. 90min	0-55	6.4	Max. 185	Min. 24Hrs	Max. 4	Max. 60

## Wire Diagram

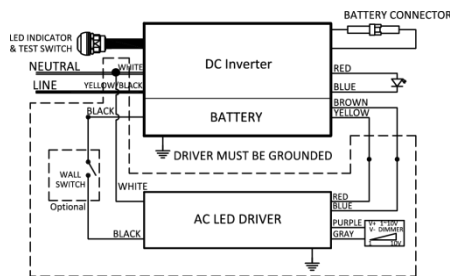

Maximum Wiring Distance (at full load) is 18AWG/18Feet

## Enclosure

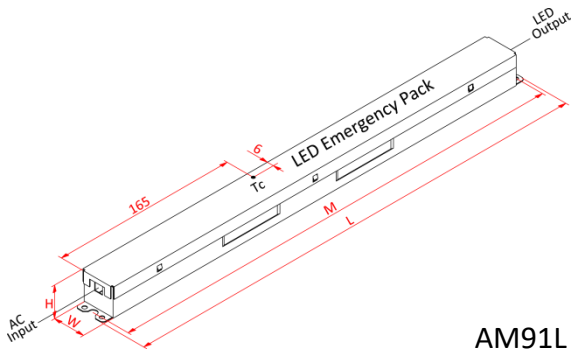

AM91L

Lead Length	Inch	Cm
Black	24	61
White	24	61
Yellow/Black	24	61
Red	24	61
Blue	24	61
Yellow	32.28	82
Brown	32.28	82
Battery Connector	33.07	84
Test Switch	25	63.5
LED Indicator	6	15.24

Enclosure	Inch	Cm
Length(L)	16.53	42
Width(W)	1.21	3.08
Height(H)	1.1	2.8
Mounting(M)	16.25	41.3