




<b>Model Name</b>	3C350D12
<b>Output Model</b>	Constant Current
<b>Input Voltage</b>	347 Vac
<b>Input Frequency</b>	50/60 Hz
<b>Dimming</b>	NA
<b>Surge Rating</b>	2KV
<b>Warranty</b>	5 Years $TC \leq 75^{\circ}C$ 3 Years $75^{\circ}C \leq TC \leq 90^{\circ}C$

## Product Specification



Output Power (W)	Output Power Per Channel (W)	Output Voltage (V)	Output Current (A)	Start Temp. (F/C)	Tcase Temp. (F/C)	Input Current (A)	Input Power (W)	Inrush Current (A)	THD (%)	Power Factor	Efficiency (%)
Max. 24	12	20-34	0.35	Min -40/-40	Max. 194/90	0.08@347V	15	Max. 25	Max. 20	Min. 0.9	Typ. 85

## Wire Diagram

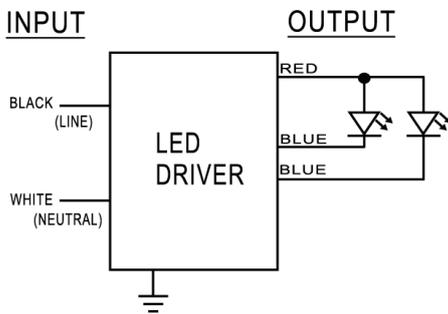


Maximum Wiring Distance (at full load) is 18AWG/18Feet

LED case should be grounded

Lead Length	Inch	Cm
Black	5.9	15
White	5.9	15
Green	NA	NA
Red	5.9	15
Blue	5.9	15

## Enclosure

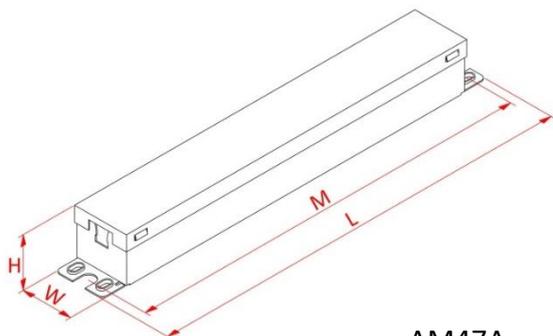

AM47A

Enclosure	Inch	Cm
Length(L)	9.5	24.1
Width(W)	1.26	3.2
Height(H)	1.14	2.9
Mounting(M)	8.9	22.6