




Model Name	R3C2200S80D
Output Mode	Constant Current
Input Voltage	347 Vac
Input Frequency	50/60 Hz
Dimming	3 in 1 (PWM,1-10V,Resistance) 1-100% Dimming
Surge Rating	2KV
Warranty	5 Years TC \leq 75°C 3 Years 75°C \leq TC \leq 90°C

Product Specification




Output Power (W)	Output Voltage (V)	Output Current (A)	Start Temp. (°F/°C)	Tcase Temp. (°F/°C)	Input Current (A)	Input Power (W)	Inrush Current (A)	THD (%)	Power Factor	Efficiency (%)
Max. 80	27-55	1.4-2.2	Min. -40/-40	Max. 194/90	0.29@347V	91	Max. 25A	Max. 20	Min. 0.9	Typ. 88

Wire Diagram

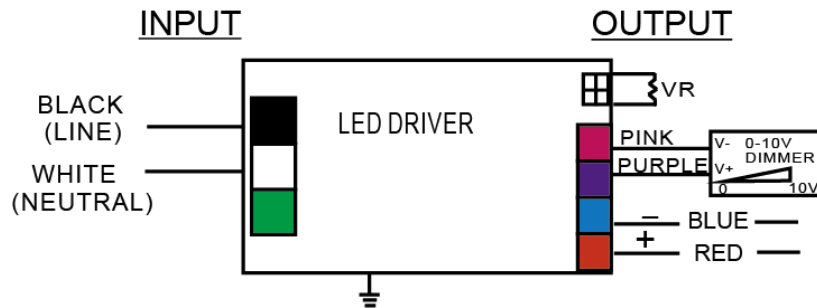

Maximum wiring distance (at full load) is 18AWG/18Feet
LED case should be grounded

Enclosure

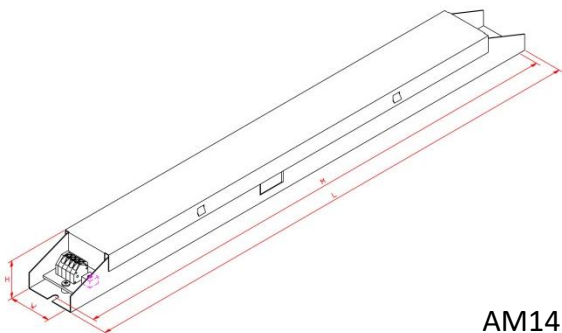

AM145

Enclosure	Inch	Cm
Length(L)	15.55	39.5
Width(W)	1.49	3.8
Height(H)	1.08	2.75
Mounting(M)	15.23	38.7