




Model Name	EPD-340SM
Ballast Type	Electronic
Starting Method	Active Instant Start
Lamp connection	Parallel
Input Voltage	347V
Input Frequency	60Hz
Warranty	5 Years $TC \leq 75^{\circ}C$ 3 Years $75^{\circ}C \leq TC \leq 90^{\circ}C$

Safety & Performance



- One or Two lamps
- Sound Rated Class A
- Auto Restart
- UL/cUL Listed
- Class P Thermally Protected
- No PCBs
- UL Type 1 Outdoor
- High Power Factor
- Type HL
- FCC part 18 Class A
- Surge Protected


Wire Diagram

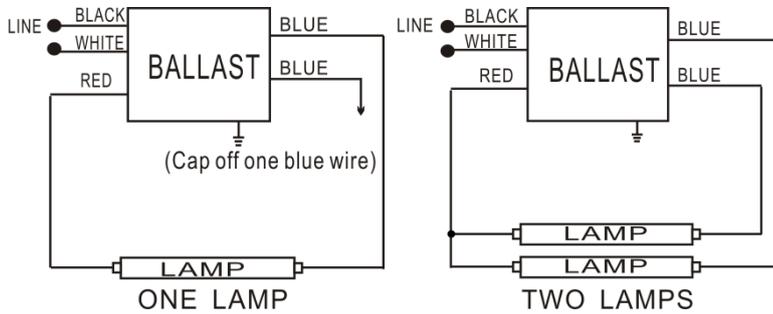

Lead Length	Inch	Cm
Black	18.8	48
White	18.8	48
Blue	30.9	78.5
Red	46.4	118

Maximum Wiring Distance (at full load) is 18AWG/18Feet
Case must be grounded

Enclosure

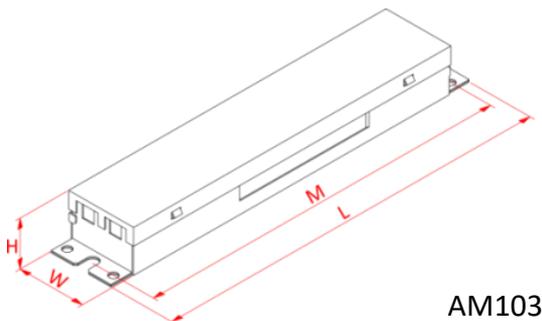

AM103

Enclosure	Inch	Cm
Length(L)	9.5	24.1
Width(W)	1.7	4.3
Height(H)	1.2	3.05
Mounting(M)	8.9	22.6



Electrical Specification with Different Lamps

Lamp Type	No. of Lamps	Input Voltage (V)	Rated Lamp Watts	Start Temp Min. (F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	THD Max. (%)	Power Factor	Lamp Current Crest Factor Max.	BEF
F40W T12	2	347	40	14/-10	0.22	75	0.85	10	0.98	1.7	1.13
	1				0.13	45	0.88	20	0.97		1.96
F48W T12	2	347	39	14/-10	0.21	73	0.85	10	0.98	1.7	1.16
	1				0.12	43	0.88	20	0.97		2.05
F42W T12	2	347	34	14/-10	0.20	69	0.85	15	0.98	1.7	1.23
	1				0.11	39	0.88	15	0.97		2.26
F36W T12	2	347	30	14/-10	0.20	69	0.85	15	0.98	1.7	1.23
	1				0.11	39	0.88	15	0.97		2.26
F24W T12	2	347	20	14/-10	0.16	57	0.85	15	0.98	1.7	1.49
	1				0.08	27	0.88	20	0.96		3.26