




Model Name	EPT-A21T5M
Ballast Type	Electronic
Starting Method	Active Instant Start
Lamp connection	Parallel
Input Voltage	120-277V
Input Frequency	50/60Hz
Warranty	5 Years $TC \leq 75^{\circ}C$ 3 Years $75^{\circ}C \leq TC \leq 90^{\circ}C$

Safety & Performance



- Two or Three lamps
- Sound Rated Class A
- Auto Restart
- UL/cUL Listed
- Class P Thermally Protected
- No PCBs
- UL Type 1 Outdoor
- High Power Factor
- Type HL
- FCC part 18 Class A
- Surge Protected


Wire Diagram

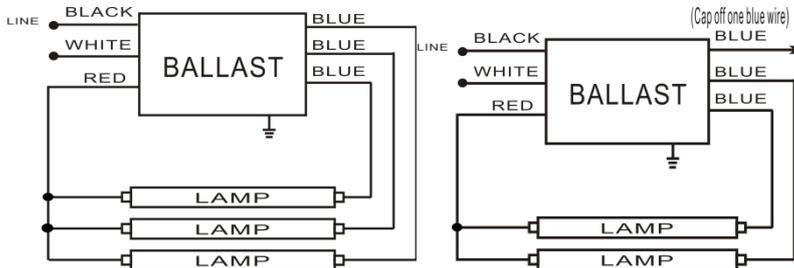

Lead Length	Inch	Cm
Black	18.8	48
White	18.8	48
Blue	30.9	78.5
Red	46.4	118

Maximum Wiring Distance (at full load) is 18AWG/18Feet
Case must be grounded

Enclosure

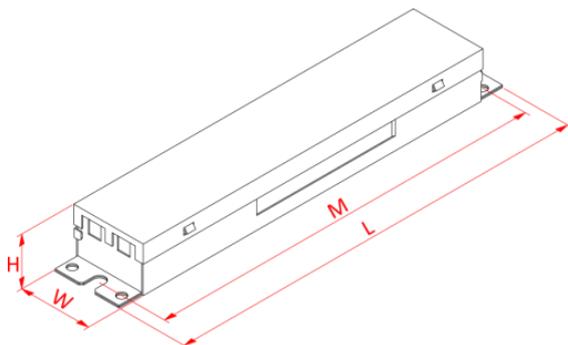

Enclosure	Inch	Cm
Length(L)	9.5	24.1
Width(W)	1.7	4.3
Height(H)	1.2	3.05
Mounting(M)	8.9	22.6

AM103



Electrical Specification with Different Lamps

Lamp Type	No. of Lamps	Input Voltage (V)	Rated Lamp Watts	Start Temp Min. (F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	THD Max. (%)	Power Factor	Lamp Current Crest Factor Max.	BEF		
21W T5	3	120	21	0/-18	0.52	62	0.9	10	0.99	1.7	1.45		
		230			0.27			10	0.99				
		277			0.22			10	0.98				
	2	120			0.36	43	0.93	10	0.99		15	0.98	2.16
		230			0.19			10	0.98				
		277			0.16			15	0.98				
14W T5	3	120	14	0/-18	0.36	43	0.93	10	0.99	1.7	2.16		
		230			0.19			10	0.98				
		277			0.16			15	0.98				
	2	120			0.25	29	0.86	15	0.98		20	0.97	2.97
		230			0.13			15	0.98				
		277			0.11			20	0.97				