



Model Name	TSD-355PBXMS-SD
Ballast Type	Electronic
Starting Method	Program Start
Lamp connection	Series
Input Voltage	347V
Input Frequency	60HZ
Warranty	5 Years $TC \leq 75^{\circ}C$ 3 Years $75^{\circ}C \leq TC \leq 90^{\circ}C$

Safety & Performance




- Two lamps
- Sound Rated Class A
- Auto Restart
- UL/cUL Listed
- Class P Thermally Protected
- No PCBs
- UL Type 1 Outdoor
- High Power Factor
- FCC part 18 Class A
- Surge Protected

Electrical Specification with Different Lamps

Lamp Type	No. of Lamps	Input Voltage (V)	Rated Lamp Watts	Start Temp Min. (F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	THD Max. (%)	Power Factor	Lamp Current Crest Factor Max.	BEF
54W T5	2	347	54	32/0	0.16/0.33	54/114	0.45/0.99	15/15	0.97/0.98	1.7	0.83/0.87
50W PLL	2	347	50	32/0	0.16/0.32	56/110	0.39/0.96	15/15	0.97/0.98	1.7	0.70/0.87
55W PLL	2	347	55	32/0	0.14/0.31	48/106	0.40/0.88	15/15	0.96/0.98	1.7	0.83/0.83

Wire Diagram

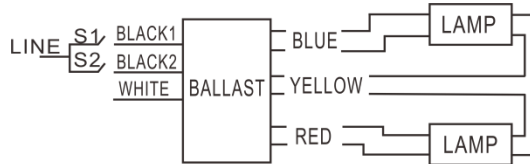


Full light(full power) S1&S2 closed(on)
Bi-level mode S1orS2 open(off)

Maximum Wiring Distance (at full load) is 18AWG/18Feet
Case must be grounded

Lead Length	Inch	Cm
Black	18.8	48
White	18.8	48
Blue	30.9	78.5
Red	30.9	78.5
Yellow	46.4	118

Enclosure

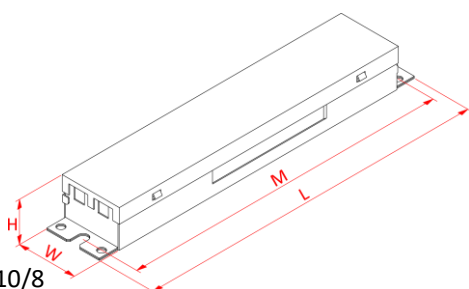

AM103

Enclosure	Inch	Cm
Length(L)	9.5	24.1
Width(W)	1.7	4.3
Height(H)	1.2	3.05
Mounting(M)	8.9	22.6