




<b>Model Name</b>	T1C1050S35
<b>Output Mode</b>	Constant Current
<b>Input Voltage</b>	120 Vac
<b>Input Frequency</b>	50/60 Hz
<b>Dimming</b>	Leading & Trailing Edge
<b>Surge Rating</b>	1KV
<b>Warranty</b>	3 Years 0°C ≤ Temp. ≤ 50°C

## Product Specification



Output Power (W)	Output Voltage (V)	Output Current (A)	Start Temp. (°F/°C)	Tcase Temp. (°F/°C)	Input Current (A)	Input Power (W)	Inrush Current (A)	THD (%)	Power Factor	Efficiency (%)
Max. 35	24-34	1.05	Min 32/0	Max. 122/50	0.35@120V	42	Max. 30	Max. 20	Min. 0.9	Typ. 85

## Wire Diagram

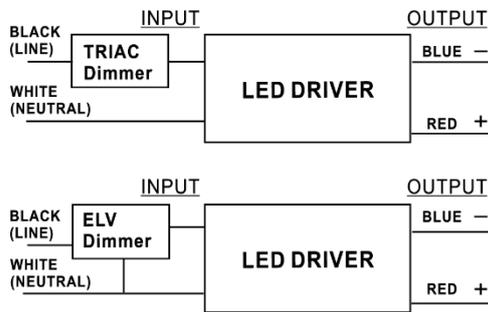


Lead Length	Inch	Cm
Black	6	15.2
White	6	15.2
Green	NA	NA
Red	6	15.2
Blue	6	15.2

Maximum Wiring Distance (at full load) is 18AWG/18Feet

LED case should be grounded

## Enclosure

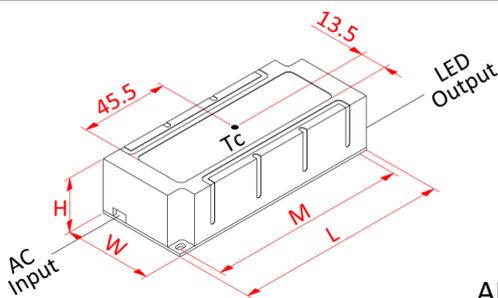

AP25

Enclosure	Inch	Cm
Length(L)	4.33	11
Width(W)	1.77	4.5
Height(H)	1.1	2.8
Mounting(M)	4.1	10.4

### Dimmer Compatibility Chart for 120VAC/60Hz

LEVITON	6633-PLW	LEVITON	RP106	LUTRON	SF-103P-WH
LEVITON	No.6674	LUTRON	DVPDC-203P	LUTRON	NTLV-600
LEVITON	6615-POW	LUTRON	DVCL-153P	LUTRON	S-600P-WH