




<b>Model Name</b>	RAC2200S80D 70W1400
<b>Output Mode</b>	Constant Current
<b>Input Voltage</b>	120-277 Vac
<b>Input Frequency</b>	50/60 Hz
<b>Dimming</b>	3 in 1 (PWM,1-10V,Resistance) 1-100% Dimming
<b>Surge Rating</b>	3KV
<b>Warranty</b>	5 Years TC $\leq$ 75 $^{\circ}$ C 3 Years 75 $^{\circ}$ C $\leq$ TC $\leq$ 90 $^{\circ}$ C

## Product Specification




Output Power (W)	Output Voltage (V)	Output Current (A)	Start Temp. ( $^{\circ}$ F/ $^{\circ}$ C)	Tcase Temp. ( $^{\circ}$ F/ $^{\circ}$ C)	Input Current (A)	Input Power (W)	Inrush Current (A)	THD (%)	Power Factor	Efficiency (%)
Max. 70	30-50	1.4	Min. -40/-40	Max. 194/90	0.83@120V 0.33@277V	80	Max. 30	Max. 20	Min. 0.9	Typ. 87

## Wire Diagram

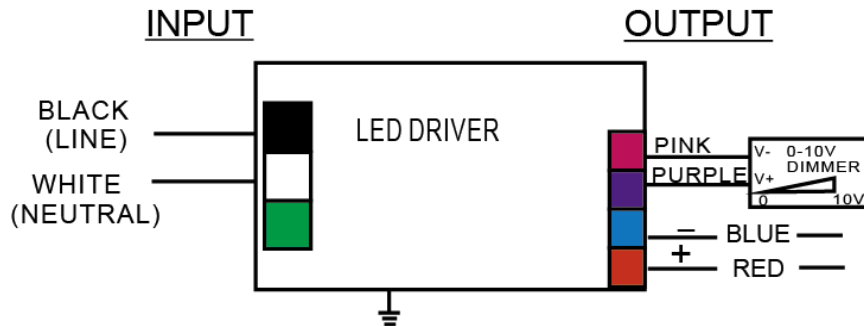

Maximum wiring distance (at full load) is 18AWG/18Feet  
LED case should be grounded

## Enclosure

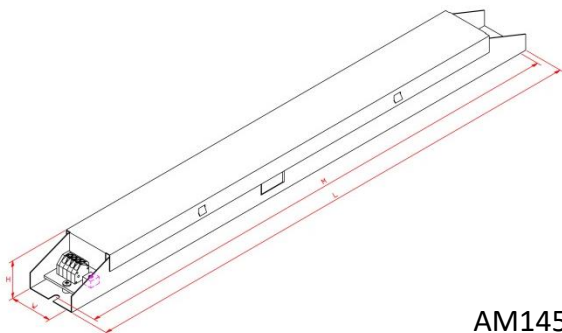

Enclosure	Inch	Cm
Length(L)	15.55	39.5
Width(W)	1.49	3.8
Height(H)	1.08	2.75
Mounting(M)	15.23	38.7