

OCTOBER
2024



安雄電子
Antron Electronics



PRODUCT CATALOG

Power Supply

Manufacuturer

电源供应器制造商

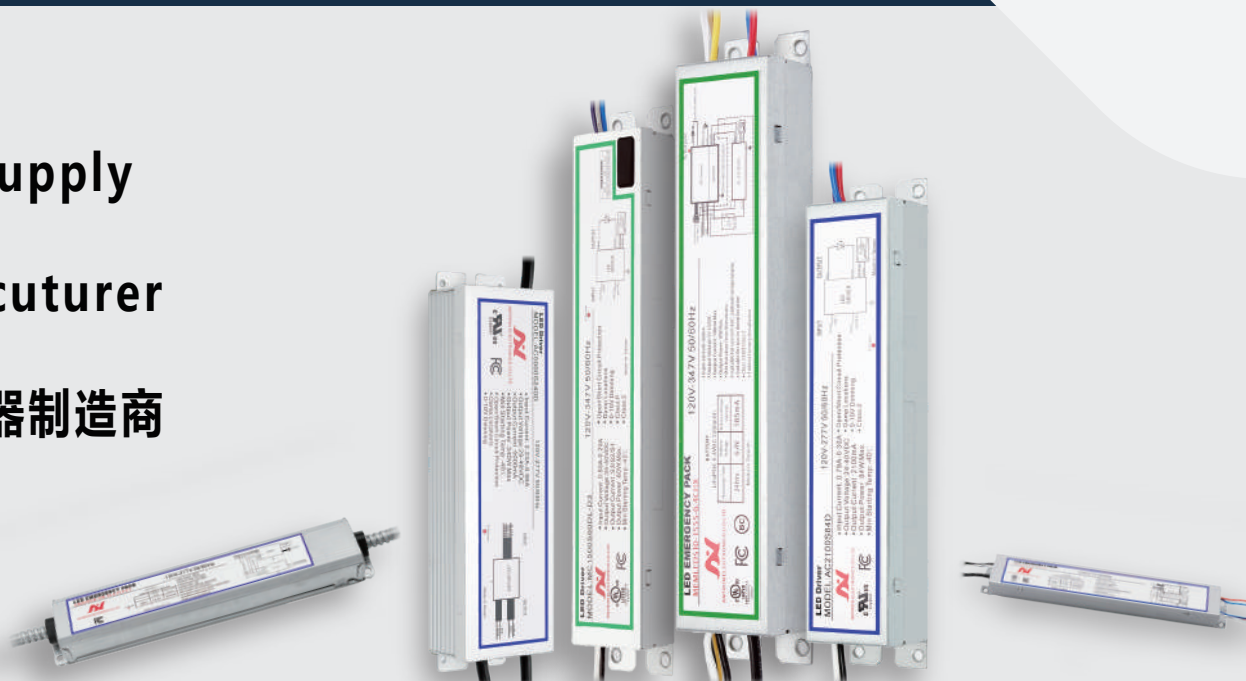


TABLE OF CONTENTS

Company information 公司訊息

- 03 Company Profile
公司简介
- 05 Antron Models
安雄电子机种命名规则

Product 产品

Emergency LED Driver

- 07 All-in-One Emergency LED Drive
All-in-One 应急电源驱动
- 08 Constant Current Emergency LED Driver
恒电流应急LED电源驱动
- 11 Constant Power Emergency LED Driver
恒功率应急LED电源驱动
- 15 Cold Pack Emergency LED Driver
低温应急电源驱动
- 16 Type B LED Tube Emergency LED Driver
Type B LED 灯管应急电源驱动
- 17 Power System Emergency LED Driver
电力系统应急电源驱动
- 18 Front-End Emergency LED Driver
前置应急电源驱动
- 19 Self Diagnostic Emergency LED Drive
自我诊断应急LED电源驱动
- 22 Automatic Load Control Relay
自动负载控制继电器

		LED Driver
	23	Constant Current LED Driver 恒流LED电源驱动
	27	Constant Voltage LED Driver 恒压LED电源驱动
	29	Triac Dimmable LED Driver 可控硅调光LED电源驱动
	31	CCT Tunable LED Driver 调光调色温LED电源驱动
	33	Programmable LED Driver NFC可程式LED电源驱动
	35	Current Selectable LED Driver 拨码电流LED电源驱动
	37	Slim LED Driver 细长型LED电源驱动
	38	Waterproof LED Driver 防水型LED电源驱动
	40	Junction Box LED Driver 接线盒LED电源驱动
	42	Microwave Occupancy LED Driver 微波感应LED电源驱动
	43	Dual Channel LED Driver 双通道输出LED电源驱动
	44	Multiple Channel LED Driver 多通道输出LED电源驱动
	45	UFO High Bay LED Driver 工矿灯LED电源驱动
		Another type
	46	Fluorescent Ballast 萤光灯电子安定器
	48	UV Ballast 紫外灯电子式安定器
	49	Emergency Lighting Inverter 应急照明逆变器
	50	GaN Power Supply 氮化镓迷你电源供应器

Company Profile

公司簡介

About Antron



關於安雄

Quality | Service | Innovation

Founded in 1986, Antron has established reputation in fluorescent ballasts and continuously dedicated to be the leading expert in lighting power supplies globally. With more than 40 years of experience in lighting power supplies, Antron developed, manufactured and customized LED drivers, emergency LED drivers, fluorescent ballasts and UV ballasts that were highly valued by worldwide customers.

Our founder, Mr. Bill Tsai, believes that consistent product quality is not only the company prime core value, but also quick response customer service as well as the technical capacity towards innovation that has proven the industry recognition and success of Antron. In addition, Antron has a team of engineering talents and facilities, including completed product development procedure, QC testing and our own EMC chamber to ensure products meet UL/cUL and CE standard.

In the future, Antron will strive to upgrade current product line and focus on convert new ideas to product design that met the industry requirement. Our mission is to assistant our clients with better, practical solutions of LED power supply and encourage win-win values and benefits to light up your business.

成立于1986年，40多年来安雄不仅在电子式安定器领域取得良好评价，进而专心致力成为照明驱动电源供应器的世界领导级专家，目标成为研发与生产为一体的国际企业。我们设计并制造各式的LED驱动电源，提供客户多元化的选择方案。长期与客户建立良好的合作关系，在业界获得非常高的评价客户遍布全球。

安雄的创办人蔡文芳先生深信，维持一贯的产品品质、提供即时而周全的客户服务，以及技术的创新潜能，是安雄足以在业界立根的企业核心价值及竞争优势此外，安雄拥有阵容坚强的研发团队以及技术设备，包含完整的产品研发流程、品质控管及验证设备及程序以确保产品符合UL/cUL、CE等國際標準。

未来，安雄将持续改良现有产品，并且开发更多新产品以符合市场需求及潮流，我们的使命是提供客户更好、更优化且全方位的电源解决方案，并创造与客户共赢的产业合作价值。

品質 | 服務 | 創新

Model Numbering System of LED Drivers


LED驱动电源机种命名规则



1. Series 系列	T EM P R UFO - Left Blank	Traic Dimming Series All-in-one Emergency Programmable Series Resistor Set UFO Series Standard Constant Current/Voltage Output	可控硅调光驱动系列 All-in-one 应急电源系列 可编程型驱动系列 电阻设定驱动系列 天井灯/工矿灯驱动系列 标准恒电流或恒电压LED驱动
2. Input Voltage 輸入電壓	1 2 3 4 7 A B C J M	120V 20V 347V (Canada) 347-480V 277V 120-277V (North America) 277-347V 220-240V (Europe) 100-240V (Japan) 120-347V	120V 20V 347V (加拿大) 347-480V 277V 120-277V (北美) 277-347V 220-240V (歐洲) 100-240V (日本) 120-347V
3. Output Mode 輸出模式	C V	Constant Current Constant Voltage	恒电流 恒电压
4. Output Current/Voltage value 輸出电流/电压值		Rated Output Current/Voltage	额定输出电流/电压值
5. Number of Channels 通道数量	S D T Q	Single Channel Dual Channels Three Channels Quad Channels	单通道 双通道 三通道 四通道
6. Output Power 輸出功率		Rated Output Power	额定输出功率
7. Dimming 调光	D	Dimming	调光
8-1. Customized Output 特殊输出方式	D2/3/4 CB/CBW/SCB EOS 6.4	Selectable output (2/3/4 section) CCT tunable microwave occupancy battery voltage of all-in-one emergency driver	拨码调段电流(2/3/4段) 调光调色温 微波感应 all-in-one应急电池电压
8-2. Options(suffix) 选配	BM L F M N -C -DC -DCJ -DCJ-2/3/4 JB	bottom wiring UL listed auxiliary outlet (12V/100mA) Mini Can Normal PF terminal connector input plug input plug & output DC jack input plug & 2/3/4 channel output DC jack Junction Box	底部出線 UL listed 輔助輸出 (12V/100mA) 迷你型 無PF設計 終端連接器 輸入插頭 輸入插頭和輸出DC插孔 輸入插頭和2/3/4通道輸出DC插孔 接線盒
9. Customization 客制化规格		Wattage, current and any special customized specification	功率 · 电流和任何特殊的客制规格

Model Numbering System of Emergency LED Drivers


應急驱动电源机种命名规则

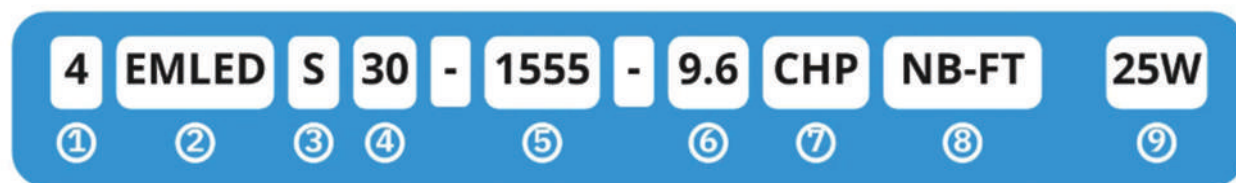

1. Input Voltage 輸入电压	Blank M 4	120-277V 120-347V 347-480V	120-277V 120-347V 347-480V
2. Series 系列	EMLED SDLED	general emergency LED driver self-diagnostic	一般应急系列 自我诊断应急系列
3. Single Output 单通道输出			
4. Output Power 輸出瓦數		Rated Output Power	额定输出功率
5. Output Voltage Range 輸出電壓範圍	1555 80130 80176 50-255 AC120/277	15-55VDC 80-130VDC 80-176VDC 50-255VDC 120 or 277VAC	15-55VDC 80-130VDC 80-176VDC 50-255VDC 120 or 277VAC
6. Battery Voltage 電池电压		Rated battery voltage	额定电池电压
7. Output Mode & Type 輸出模式及类别	CHX CHP -FCP -FCPR -FCPB -FCPUR	constant current constant power front-end constant power front-end constant power with remote control front-end constant power for Type B lamp front-end UFO constant power with remote control	定电流 定功率 前置定功率 前置定功率(附遥控器) 前置定功率搭配Type B灯管 前置UFO定功率(附遥控器)
8. Optional Features 其他选配	NB O L ML BM -PR -PRN -HL -FTS -FT -FTC -FTR EX BEX LA	no black wire no battery wire narrow micro narrow bottom mount isolated pass relay isolated pass relay control Neutral suitable for Class I Division 2 hazardous location luminaires single flex conduit dual flex conduit single flex conduit with fire-resistant test switch wire dual flex conduit with R-mount test switch external battery external battery without housing -20°C ambient	无黑线 无电池线 细长型 矮型+细长型 底部出线 isolated pass relay 控制中性线的隔离继电器 适用于 Class I Division 2 危险场所灯具 单蛇管 双蛇管 单边蛇管+单边耐阻燃线 测试按钮 双蛇管+弯形测试按钮 分离式电池 分离式电池·电池无外壳 -20°C低温
9. Customization 客制化规格		Wattage, current and any special customized specification	功率·电流和任何特殊的 客制规格

All-in-One Emergency LED Driver

All-in-One应急电源驱动

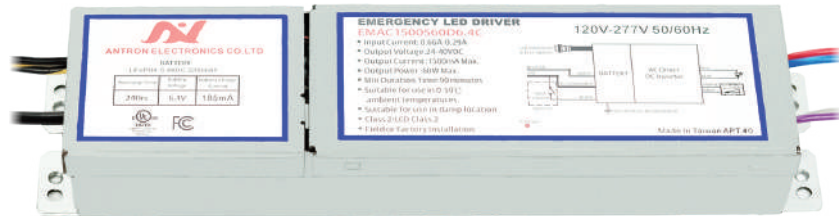

Product Feature

- Universal input voltage 120-277 VAC
- At least 90 minutes in emergency mode
- All-in-One solution(Driver/Converter/Battery)
- 3-in-1 Dimming (PWM, 0-10V, Resistance)
- Open/Short/Over-Voltage/Over Temp protection
- Suitable for UL dry and damp location.
- High quality LiFePO4 battery inside
- 5 years warranty

产品特点

- 国际通用输入电压120-277 VAC
- 应急模式可持续至少90分钟
- All-in-One应急方案(驱动/应急模组/电池)
- 三合一调光功能 (PWM, 0-10V,电阻)
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- 内置高质量锂电池LiFePO4
- 五年质保

Product Specification

产品规格

Model Name 机种名称	Input	Output			Emergency Output			
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Power 应急输出功率 W	Current 应急输出电流 mA	Voltage 应急输出电压 V	Dimension 尺寸 mm
EMAC1050S40D6.4	120-277	40	1050	22-38	10	190	15-55	261*61*37
EMAC1150S50D6.4	120-277	50	1150	26-43	10	190	15-55	261*61*37
EMAC1500S60D6.4	120-277	60	1500	24-40	10	190	15-55	261*61*37

Constant Current Emergency LED Driver

恒电流应急LED电源驱动



Product Feature

- Universal input voltage 120-277, 120-347 VAC
- At least 90 minutes in emergency mode
- Emergency pack is compatible with any AC driver
- High quality LiFePO4 battery inside
- Open/Short/Over-Voltage/Over Temp protection
- Suitable for UL dry and damp location.
- UL listed and CEC title 20 approval
- 5 years warranty

产品特点

- 国际通用输入电压120-277, 120-347 VAC
- 应急模式可持续至少90分钟
- 应急模组可与任何AC驱动电源匹配
- 内置高质量锂电电池LiFePO4
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- UL listed 和 CEC title 20 认证通过
- 五年质保

Product Specification

产品规格

Nominal Voltage(15-55V) Standard Series

常压(15-55V) 标准规格

Model Name 机种名称	Input	Emergency Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
EMLEDS10-1555-6.4CHXNB 5W	120-277	5	91	15-55	None	241*43*29.5
EMLEDS10-1555-6.4CHXNB	120-277	10	190	15-55	None	241*43*29.5
EMLEDS10-1555-6.4CHXNB-FT	120-277	10	190	15-55	Dual	241*43*29.5

Nominal Voltage(15-55V) Standard Series

常压(15-55V) 标准规格

Model Name 机种名称	Input		Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V			
EMLEDS20-1555-9.6CHXNB 16W	120-277	16	290	15-55		None	338*62*38
EMLEDS20-1555-9.6CHXNB-FT 16W	120-277	16	290	15-55		Dual	338*62*38
EMLEDS20-1555-9.6CHXNB	120-277	20	380	15-55		None	338*62*38
EMLEDS20-1555-9.6CHXNB-FT	120-277	20	380	15-55		Dual	338*62*38
EMLEDS30-1555-9.6CHXNB 25W	120-277	25	455	15-55		None	338*62*38
EMLEDS30-1555-9.6CHXNB-FT 25W	120-277	25	455	15-55		Dual	338*62*38
EMLEDS30-1555-9.6CHXNB	120-277	30	545	15-55		None	338*62*38
EMLEDS30-1555-9.6CHXNB-FT	120-277	30	545	15-55		Dual	338*62*38
MEMLEDS10-1555-6.4CHXNB	120-347	10	190	15-55		None	241*43*29.5
MEMLEDS10-1555-6.4CHXNB-FT	120-347	10	190	15-55		Dual	241*43*29.5
MEMLEDS20-1555-9.6CHXNB	120-347	20	380	15-55		None	338*62*38
MEMLEDS20-1555-9.6CHXNB-FT	120-347	20	380	15-55		Dual	338*62*38

Nominal Voltage(15-55V) Special Series

常压(15-55V) 特殊规格

Model Name 机种名称	Input		Output			Remark 备注	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V			
EMLEDS10-1555-6.4CHXNBL 4W	120-277	4	72	15-55		Slim Type	420*30.5*28
EMLEDS10-1555-6.4CHXNBL	120-277	10	190	15-55		Slim Type	420*30.5*28
EMLEDS10-1555-6.4CHXNBBL	120-277	10	190	15-55		Bottom Mount	214*43*30.5
EMLEDS10-1555-6.4CHXNB-FTC	120-277	10	190	15-55		Flame Retardant	241*43*30.5
EMLEDS10-1555-6.4CHXNBEX	120-277	10	190	15-55		External Battery	133*63*30
EMLEDS20-1555-9.6CHXNBEX 16W	120-277	16	290	15-55		External Battery	133*63*30
EMLEDS20-1555-9.6CHXNB-FTC	120-277	20	380	15-55		Flame Retardant	338*62*38
EMLEDS20-1555-9.6CHXNBEX	120-277	20	380	15-55		External Battery	133*63*30
EMLEDS30-1555-9.6CHXNBEX 25W	120-277	25	455	15-55		External Battery	133*63*30
EMLEDS30-1555-9.6CHXNBEX	120-277	30	545	15-55		External Battery	133*63*30
MEMLEDS10-1555-6.4CHXNBL 4W	120-347	4	72	15-55		Slim Type	420*30.5*28
MEMLEDS10-1555-6.4CHXNBL	120-347	10	190	15-55		Slim Type	420*30.5*28
MEMLEDS10-1555-6.4CHXNBEX	120-347	10	190	15-55		External Battery	133*63*30
MEMLEDS20-1555-9.6CHXNBEX 16W	120-347	16	290	15-55		External Battery	133*63*30
MEMLEDS20-1555-9.6CHXNBEX	120-347	20	380	15-55		External Battery	133*63*30
MEMLEDS30-1555-9.6CHXNBEX 25W	120-347	25	455	15-55		External Battery	133*63*30
MEMLEDS30-1555-9.6CHXNBEX	120-347	30	545	15-55		External Battery	133*63*30

High Voltage(80-130V) Series

高压(80-130V) 标准规格

Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Metal Conduit 金属导管	Dimension 尺寸 mm
EEMLEDS8-80130-6.4CHXNB	120-277	8	70	80-130	None	241*43*29.5
EMLEDS8-80130-6.4CHXNB-FT	120-277	8	70	80-130	Dual	241*43*29.5
EMLEDS28-80130-9.6CHXNB	120-277	28	230	80-130	None	338*62*38
EMLEDS28-80130-9.6CHXNB-FT	120-277	28	230	80-130	Dual	338*62*38
MEMLEDS8-80130-6.4CHXNB	120-347	8	70	80-130	None	241*43*29.5
MEMLEDS8-80130-6.4CHXNB-FT	120-347	8	70	80-130	Dual	241*43*29.5
MEMLEDS28-80130-9.6CHXNB	120-347	28	230	80-130	None	338*62*38
MEMLEDS28-80130-9.6CHXNB-FT	120-347	28	230	80-130	Dual	338*62*38

High Voltage(80-130V) Series

高压(80-130V) 特殊规格

Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Remark 备注	Dimension 尺寸 mm
EMLEDS8-80130-6.4CHXNBL	120-277	8	70	80-130	Slim Type	420*30.5*28
MEMLEDS8-80130-6.4CHXNBL	120-347	8	70	80-130	Slim Type	420*30.5*28

Ultra High Voltage(80-176V) Series


超高压(80-176V) 标准规格

Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Metal Conduit 金属导管	Dimension 尺寸 mm
EMLEDS8-80176-6.4CHXNB	120-277	8	47	80-176	None	241*43*29.5
EMLEDS8-80176-6.4CHXNB-FT	120-277	8	47	80-176	Dual	241*43*29.5
EMLEDS28-80176-9.6CHXNB	120-277	28	168	80-176	None	338*62*38
EMLEDS28-80176-9.6CHXNB-FT	120-277	28	168	80-176	Dual	338*62*38
MEMLEDS8-80176-6.4CHXNB	120-347	8	47	80-176	None	241*43*29.5
MEMLEDS8-80176-6.4CHXNB-FT	120-347	8	47	80-176	Dual	241*43*29.5
MEMLEDS28-80176-9.6CHXNB	120-347	28	168	80-176	None	338*62*38
MEMLEDS28-80176-9.6CHXNB-FT	120-347	28	168	80-176	Dual	338*62*38

Note: The output current can be customized in factory
备注：输出电流可以由工厂客制调整

Constant Power Emergency LED Driver

恒功率应急LED电源驱动

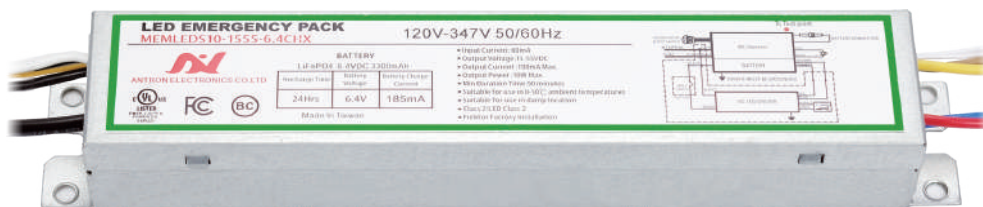

Product Feature

- Universal input voltage 120-277, 120-347, 347-480 VAC
- At least 90 minutes in emergency mode
- Emergency pack is compatible with any AC driver
- High quality LiFePO4 battery inside
- Open/Short/Over-Voltage/Over Temp protection
- Suitable for UL dry and damp locaion.
- UL listed and CEC title 20 approval
- 5 years warranty

产品特色

- 国际通用输入电压120-277, 120-347, 347-480 VAC
- 应急模式可持续至少90分钟
- 应急模组可与任何AC驱动电源匹配
- 内置高质量锂电池LiFePO4
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- UL listed 和 CEC title 20 认证通过
- 五年质保

Product Specification

产品规格

Nominal Voltage(15-55V) Standard Series

常压(15-55V) 标准规格

Model Name 机种名称	Input	Emergency Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
EMLED10-1555-6.4CHPNB 5W	120-277	5	333-91	15-55	None	241*43*29.5
EMLED10-1555-6.4CHPNB	120-277	10	670-180	15-55	None	241*43*29.5
EMLED10-1555-6.4CHPNB-FT	120-277	10	670-180	15-55	Dual	241*43*29.5

Nominal Voltage(15-55V) Standard Series

常压(15-55V) 标准规格

Model Name 机种名称	Input		Output		Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
EMLEDS10-1555-6.4CHPNB-FTR	120-277	10	670-180	15-55	Dual	241*43*29.5
EMLEDS14-1555-9.6CHPNB	120-277	14	935-250	15-55	None	304*43*30.5
EMLEDS14-1555-9.6CHPNB-FT	120-277	14	935-250	15-55	Dual	304*43*30.5
EMLEDS20-1555-9.6CHPNB 16W	120-277	16	1060-290	15-55	None	338*62*38
EMLEDS20-1555-9.6CHPNB	120-277	20	1350-360	15-55	None	338*62*38
EMLEDS20-1555-9.6CHPNB-FT	120-277	20	1350-360	15-55	Dual	338*62*38
EMLEDS30-1555-9.6CHPNB 25W	120-277	25	1666-454	15-55	None	338*62*38
EMLEDS30-1555-9.6CHPNB-FT 25W	120-277	25	1666-454	15-55	Dual	338*62*38
EMLEDS30-1555-9.6CHPNB	120-277	30	2000-545	15-55	None	338*62*38
EMLEDS30-1555-9.6CHPNB-FT	120-277	30	2000-545	15-55	Dual	338*62*38
MEMLEDS10-1555-6.4CHPNB	120-347	10	670-180	15-55	None	241*43*29.5
MEMLEDS10-1555-6.4CHPNB-FT	120-347	10	670-180	15-55	Dual	241*43*29.5
MEMLEDS14-1555-9.6CHPNB	120-347	14	935-250	15-55	None	304*43*30.5
MEMLEDS14-1555-9.6CHPNB-FT	120-347	14	935-250	15-55	Dual	304*43*30.5
MEMLEDS20-1555-9.6CHPNB	120-347	20	1350-360	15-55	None	338*62*38
MEMLEDS20-1555-9.6CHPNB-FT	120-347	20	1350-360	15-55	Dual	338*62*38
MEMLEDS30-1555-9.6CHPNB 25W	120-347	25	1666-454	15-55	None	338*62*38
MEMLEDS30-1555-9.6CHPNB-FT 25W	120-347	25	1666-454	15-55	Dual	338*62*38
MEMLEDS30-1555-9.6CHPNB	120-347	30	2000-545	15-55	None	338*62*38
MEMLEDS30-1555-9.6CHPNB-FT	120-347	30	2000-545	15-55	Dual	338*62*38
4EMLEDS10-1555-6.4CHPNB	347-480	10	670-180	15-55	None	241*43*29.5
4EMLEDS10-1555-6.4CHPNB-FT	347-480	10	670-180	15-55	Dual	241*43*29.5
4EMLEDS20-1555-9.6CHPNB	347-480	20	1350-360	15-55	None	338*62*38
4EMLEDS20-1555-9.6CHPNB-FT	347-480	20	1350-360	15-55	Dual	338*62*38
4EMLEDS30-1555-9.6CHPNB 25W	347-480	25	1666-454	15-55	None	338*62*38
4EMLEDS30-1555-9.6CHPNB-FT 25W	347-480	25	1666-454	15-55	Dual	338*62*38
4EMLEDS30-1555-9.6CHPNB	347-480	30	2000-545	15-55	None	338*62*38
4EMLEDS30-1555-9.6CHPNB-FT	347-480	30	2000-545	15-55	Dual	338*62*38

Nominal Voltage(15-55V) Special Series

常压(15-55V) 特殊规格

Model Name 机种名称	Input	Emergency Output			Remark 备注	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
EMLEDS10-1555-6.4CHPNBML 5W	120-277	5	333-91	15-55	Low Profile	421.6*30*25.4
EMLEDS10-1555-6.4CHPNBBM 5W	120-277	5	333-91	15-55	Bottom Mount	214*43*30.5
EMLEDS10-1555-6.4CHPNBL	120-277	10	670-180	15-55	Slim Type	420*30.5*28
EMLEDS10-1555-6.4CHPNBML	120-277	10	670-180	15-55	Low Profile	421.6*30*25.4
EMLEDS10-1555-6.4CHPNBBM	120-277	10	670-180	15-55	Bottom Mount	214*43*30.5
EMLEDS10-1555-6.4CHPNB-FTC	120-277	10	670-180	15-55	Flame Retardant	241*43*30.5
EMLEDS10-1555-6.4CHPNBEX	120-277	10	670-180	15-55	External Battery	133*63*30
EMLEDS14-1555-9.6CHPNBML 12.8V	120-277	14	935-250	15-55	Low Profile	421.6*30*25.4
EMLEDS20-1555-9.6CHPNBEX 16W	120-277	16	1060-290	15-55	External Battery	133*63*30
EMLEDS20-1555-9.6CHPNB-FTC	120-277	20	1350-360	15-55	Flame Retardant	338*62*38
EMLEDS20-1555-9.6CHPNBEX	120-277	20	1350-360	15-55	External Battery	133*63*30
EMLEDS30-1555-9.6CHPNBEX 25W	120-277	25	1666-454	15-55	External Battery	133*63*30
EMLEDS30-1555-9.6CHPNBEX	120-277	30	2000-545	15-55	External Battery	133*63*30
MEMLEDS10-1555-6.4CHPNBML 4W	120-347	4	267-73	15-55	Low Profile	421.6*30*25.4
MEMLEDS10-1555-6.4CHPNBL	120-347	10	670-180	15-55	Slim Type	420*30.5*28
MEMLEDS10-1555-6.4CHPNBML	120-347	10	670-180	15-55	Low Profile	421.6*30*25.4
MEMLEDS10-1555-6.4CHPNB-FTC	120-347	10	670-180	15-55	Flame Retardant	241*43*30.5
MEMLEDS10-1555-6.4CHPNBEX	120-347	10	670-180	15-55	External Battery	133*63*30
MEMLEDS14-1555-9.6CHPNBML 12.8V	120-347	14	935-250	15-55	Low Profile	421.6*30*25.4
MEMLEDS20-1555-9.6CHPNBEX 16W	120-347	16	1060-290	15-55	External Battery	133*63*30
MEMLEDS20-1555-9.6CHPNB-FTC	120-347	20	1350-360	15-55	Flame Retardant	338*62*38
MEMLEDS20-1555-9.6CHPNBEX	120-347	20	1350-360	15-55	External Battery	133*63*30
MEMLEDS30-1555-9.6CHPNBEX 25W	120-347	25	1666-454	15-55	External Battery	133*63*30
MEMLEDS30-1555-9.6CHPNBEX 30W	120-347	30	2000-545	15-55	External Battery	133*63*30

High Voltage(30-130V) Series

高压(30-130V) 标准规格

Model Name 机种名称	Input	Emergency Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
EMLEDS10-30130-12.8CHPNB	120-277	10	333-77	30-130	None	304*43*30.5
EMLEDS10-30130-12.8CHPNB-FTS	120-277	10	333-77	30-130	Single	304*43*30.5
EMLEDS20-30130-12.8CHPNB	120-277	20	667-154	30-130	None	338*62*38
EMLEDS30-30130-12.8CHPNB 25W	120-277	25	833-192	30-130	None	338*62*38
EMLEDS30-30130-12.8CHPNB	120-277	30	1000-231	30-130	None	338*62*38
MEMLEDS20-30130-12.8CHPNB	120-347	20	667-154	30-130	None	338*62*38
4EMLEDS20-30130-12.8CHPNB	347-480	20	667-154	30-130	None	338*62*38

Ultra High Voltage(50-255V) Series


超高压(50-255V) 标准规格

Model Name 机种名称	Input	Emergency Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
EMLEDS30-50255-25.6CHPNB-FT 20W	120-277	20	400-78	50-255	Dual	338*62*38
EMLEDS30-50255-25.6CHPNB 25W	120-277	25	500-98	50-255	None	338*62*38
EMLEDS30-50255-25.6CHPNB-FT 25W	120-277	25	500-98	50-255	Dual	338*62*38
EMLEDS30-50255-25.6CHPNB	120-277	30	600-118	50-255	None	320*57*52
EMLEDS30-50255-25.6CHPNB-FTS	120-277	30	600-118	50-255	Single	320*57*52
MEMLEDS30-50255-25.6CHPNB 25W	120-347	25	500-98	50-255	None	338*62*38
MEMLEDS30-50255-25.6CHPNB-FT 25W	120-347	25	500-98	50-255	Dual	338*62*38
MEMLEDS30-50255-25.6CHPNB	120-347	30	600-118	50-255	None	320*57*52
MEMLEDS30-50255-25.6CHPNB-FTS	120-347	30	600-118	50-255	Single	320*57*52
4EMLEDS30-50255-25.6CHPNB 25W	347-480	25	500-98	50-255	None	338*62*38
4EMLEDS30-50255-25.6CHPNB-FTS 25W	347-480	25	500-98	50-255	Single	320*57*52
4EMLEDS30-50255-25.6CHPNB-FT 25W	347-480	25	500-98	50-255	Dual	338*62*38
4EMLEDS30-50255-25.6CHPNB	347-480	30	600-118	50-255	None	320*57*52
4EMLEDS30-50255-25.6CHPNB-FTS	347-480	30	600-118	50-255	Single	320*57*52

Note: The output current can be customized in factory
备注：输出电流可以由工厂客制调整

Cold Pack Emergency LED Driver

低温应急电源驱动

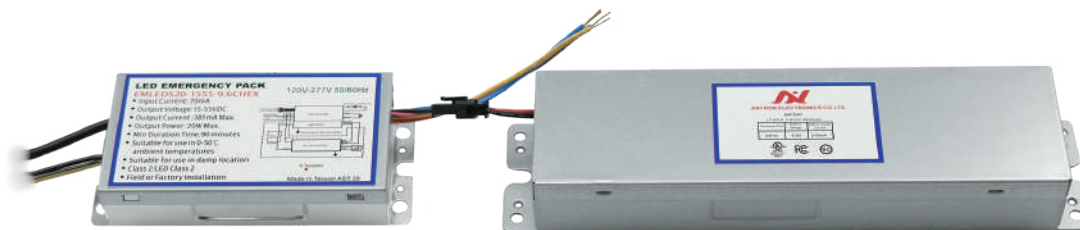

Product Feature

- Universal input voltage 120-277,120-347 VAC
- At least 90 minutes in emergency mode
- Operate under extreme cold weather at -20°C/-4°F
- High quality Lithium-Ion battery
- Open/Short/Over-Voltage/Over Temp protection
- Suitable for UL dry and damp location.
- UL listed and CEC title 20 approval
- 5 years warranty

产品特色

- 国际通用输入电压120-277, 120-347 VAC
- 应急模式可持续至少90分钟
- 可工作于极冷天气下-20°C/-4°F
- 高质量锂离子电池
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- UL listed 和 CEC title 20 认证通过
- 五年质保

Product Specification


产品规格

Model Name 机种名称	Input	Emergency Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
EMLEDS10-1555-7.2CHPNBEXLA*	120-277	10	670-180	15-55	None	133*63*30
EMLEDS10-1555-7.2CHPNBLA	120-277	10	670-180	15-55	None	241*61*37
MEMLEDS10-1555-7.2CHPNBEXLA*	120-347	10	670-180	15-55	None	133*63*30
MEMLEDS10-1555-7.2CHPNBLA	120-347	10	670-180	15-55	None	241*61*37

*Model includes external battery 85*62*35mm

Type B LED Tube Emergency LED Driver

Type B LED 灯管应急电源驱动

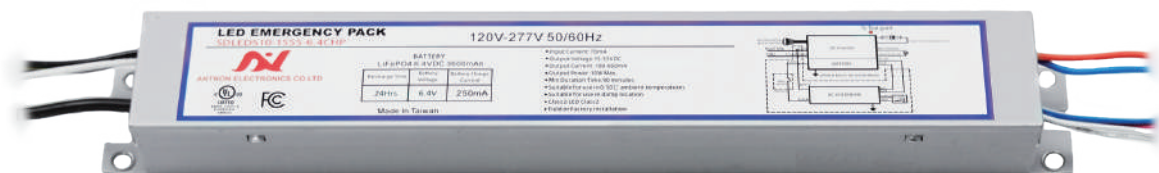

Product Feature

- Universal input voltage 120-277 VAC
- At least 90 minutes in emergency mode
- Emergency pack is designed for Type B LED Tube
- High quality 12.8V LiFePO4 battery inside
- Open/Short/Over-Voltage/Over Temp protection
- Suitable for UL dry and damp location.
- UL listed and CEC title 20 approval
- 5 years warranty

产品特点

- 国际通用输入电压 120-277 VAC
- 应急模式可持续至少90分钟
- 专为 Type B LED 灯管设计应急模组
- 内置高质量锂电池 12.8V LiFePO4
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- UL listed 和 CEC title 20 认证通过
- 五年质保


Product Specification

产品规格

Model Name 机种名称	Input	Emergency Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
EMLEDS10-170-14.4-FCPB 12.8	120-277	Max. 10	Load Dependent	40-180	None	304*43*30.5
EMLEDS10-170-12.8-FCPBL	120-277	Max. 10	Load Dependent	40-180	None	395*38*29
EMLEDS10-170-14.4-FCPB-FTS 12.8	120-277	Max. 10	Load Dependent	40-180	Single	304*43*30.5

Power System Emergency LED Driver

电力系统应急电源驱动

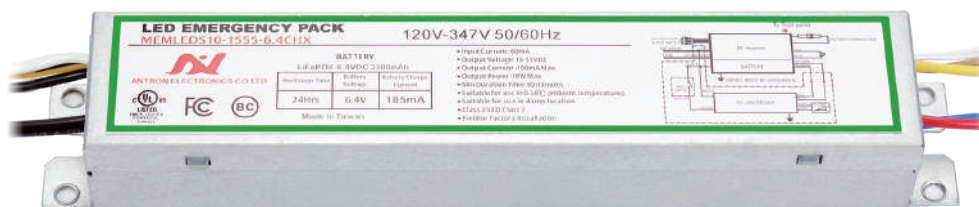

Product Feature

- Universal input voltage 120-277 VAC
- Emergency pack is designed for external 48VDC power system.
- Open/Short/Over-Voltage/Over Temp protection
- Suitable for UL dry and damp location.
- UL listed and CEC title 20 approval
- 5 years warranty

产品特点

- 国际通用输入电压120-277VAC
- 专为外部 48 VDC 电源系统应急模组
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- UL listed 和 CEC title 20 认证通过
- 五年质保

Product Specification

产品规格

Model Name 机种名称	Input	Emergency Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
EMLEDS20-1555-48CHXNB	120-277	20	380	15-55	None	241*43*29.5

Front-End Emergency LED Driver

前置应急电源驱动



Product Feature

- Universal input voltage 120-277, 120-347 VAC
- At least 90 minutes in emergency mode
- Auto dimming 0-10V
- High quality LiFePO4 battery inside
- Open/Short/Over-Voltage/Over Temp protection
- Suitable for UL dry and damp location.
- UL listed and CEC title 20 approval
- 5 years warranty

产品特点

- 国际通用输入电压120-277, 120-347 VAC
- 应急模式可持续至少90分钟
- 自动调光0-10V
- 内置高质量锂电池LiFePO4
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- UL listed 和 CEC title 20 认证通过
- 五年质保


Product Specification

产品规格

Model Name 机种名称	Input	Emergency Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 VDC		
EMLEDS10-170-14.4-FCP 12.8	120-277	10	59	120-180	None	304*43*30.5
EMLEDS10-170-14.4-FCP-FTS 12.8	120-277	10	59	120-180	single	304*43*30.5
EMLEDS30-170-12.8-FCP 23W	120-277	23	135	120-180	None	338*62*38
EMLEDS30-170-12.8-FCP-FT 23W	120-277	23	135	120-180	Dual	338*62*38
MEMLEDS10-170-14.4-FCP-FTS 12.8	120-347	10	59	120-180	single	304*43*30.5
MEMLEDS20-170-14.4-FCP 12.8	120-347	20	120	120-180	None	338*62*38
MEMLEDS20-170-14.4-FCP-FT 12.8	120-347	20	120	120-180	Dual	338*62*38

Self Diagnostic Emergency LED Driver

自我诊断应急LED电源驱动

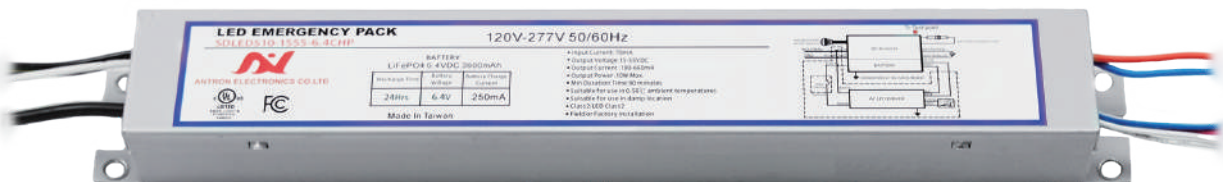

Product Feature

- Universal input voltage 120-277, 347-480 VAC
- Perform the condition via bi-color LED indicator
- Automatically operate a 30 seconds short-term test each month
- Automatically operate a 90 minutes duration test every 12 months
- Open/Short/Over-Voltage/Over Temp protection
- Suitable for UL dry and damp locaion.
- UL listed and CEC title 20 approval
- 5 years warranty

产品特色

- 国际通用输入电压120-277, 347-480 VAC
- 通过双色 LED 指示灯显示目前状态
- 每月自动运行一次30 秒的短期测试
- 每 12 个月自动运行一次90 分钟的放电测试
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- UL listed 和 CEC title 20 认证通过
- 五年质保

Product Specification

产品规格

Nominal Voltage(15-55V) Standard Series

常压(15-55V) 标准规格

Model Name 机种名称	Input	Emergency Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
SDLEDS10-1555-6.4CHPNB	120-277	10	660-180	15-55	None	304*43*30.5
SDLEDS10-1555-6.4CHPNBL	120-277	10	660-180	15-55	None	420*30.5*28
SDLEDS10-1555-6.4CHPNB-FT	120-277	10	660-180	15-55	Dual	304*43*30.5

Nominal Voltage(15-55V) Standard Series

常压(15-55V) 标准规格

Model Name 机种名称	Input	Emergency Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
SDLEDS14-1555-9.6CHPNB	120-277	14	933-254	15-55	None	304*43*30.5
SDLEDS14-1555-9.6CHPNB-FT	120-277	14	933-254	15-55	Dual	304*43*30.5
SDLEDS20-1555-9.6CHPNB	120-277	20	1350-360	15-55	None	390*57*33
SDLEDS20-1555-9.6CHPNB-FT	120-277	20	1350-360	15-55	Dual	390*57*33
SDLEDS30-1555-9.6CHPNB	120-277	30	2000-545	15-55	None	390*57*33
SDLEDS30-1555-9.6CHPNB-FT	120-277	30	2000-545	15-55	Dual	390*57*33

Nominal Voltage(15-55V) Power Activate Series

常压(15-55V) 过电启动

Model Name 机种名称	Input	Emergency Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
SDLEDS10-1555-6.4CHPNBO	120-277	10	660-180	15-55	None	304*43*30.5
SDLEDS10-1555-6.4CHPNBLO	120-277	10	660-180	15-55	None	420*30.5*28
SDLEDS10-1555-6.4CHPNBO-FT	120-277	10	660-180	15-55	Dual	304*43*30.5
SDLEDS14-1555-9.6CHPNBO	120-277	14	933-254	15-55	None	304*43*30.5
SDLEDS14-1555-9.6CHPNBO-FT	120-277	14	933-254	15-55	Dual	304*43*30.5
SDLEDS20-1555-9.6CHPNBO	120-277	20	1350-360	15-55	None	390*57*33
SDLEDS20-1555-9.6CHPNBO-FT	120-277	20	1350-360	15-55	Dual	390*57*33
SDLEDS30-1555-9.6CHPNBO	120-277	30	2000-545	15-55	None	390*57*33
SDLEDS30-1555-9.6CHPNBO-FT	120-277	30	2000-545	15-55	Dual	390*57*33

Ultra High Voltage(50-255V) Series

超高压(50-255V) 标准规格

Model Name 机种名称	Input	Emergency Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
SDLEDS30-50255-25.6CHPNB	120-277	30	660-180	50-255	None	320*57*52

Ultra High Voltage(50-255V) Power Activate Series

超高压(50-255V) 过电启动


Model Name 机种名称	Input	Emergency Output			Metal Conduit 金属导管	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
SDLEDS30-50255-25.6CHPNBO 25W	120-277	25	500-98	50-255	None	320*57*52
SDLEDS30-50255-25.6CHPNBO-FTS 25W	120-277	25	500-98	50-255	Single	320*57*52
SDLEDS30-50255-25.6CHPNBO	120-277	30	600-118	50-255	None	320*57*52
SDLEDS30-50255-25.6CHPNBO-FTS	120-277	30	600-118	50-255	Single	320*57*52
4SDLEDS30-50255-25.6CHPNBO	347-480	30	660-180	50-255	None	320*57*52

Note: The output current can be customized in factory
备注：输出电流可以由工厂客制调整



Automatic Load Control Relay

自动负载控制继电器

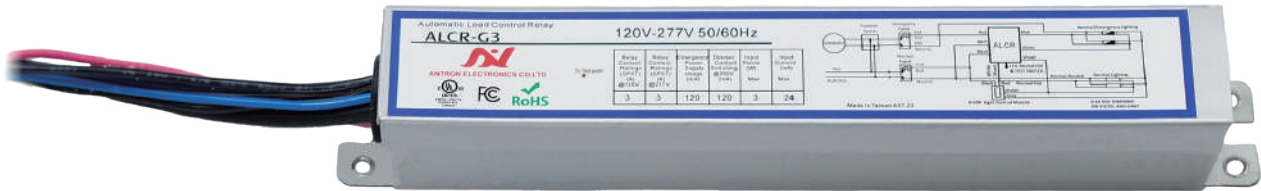

Product Feature

- Universal input voltage 120-277 VAC
- Open/Short/Over-Voltage/Over Temp protection
- Suitable for UL dry and damp location.
- UL listed and CEC title 20 approval
- 5 years warranty

产品特点

- 国际通用输入电压120-277VAC
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- UL listed 和 CEC title 20 认证通过
- 五年质保


Product Specification

产品规格

Input						
Model Name 机种名称	Voltage 输入电压 VAC	Input Power 输出功率 W	Input Current 输出电流 mA	Emergency Power Supply Usage 应急电源使用 mA	Relay Contact Ratings 继电器触点额定值 A	Dimension 尺寸 mm
ALCR-G3	120-277	3	60	120	3	203*30*29.2
ALCR-G20B	120-277	3	60	120	20	241*43*29.5
ALCR-G20	120-277	3	60	120	20	241*43*29.5

Constant Current LED Driver

恒流LED电源驱动

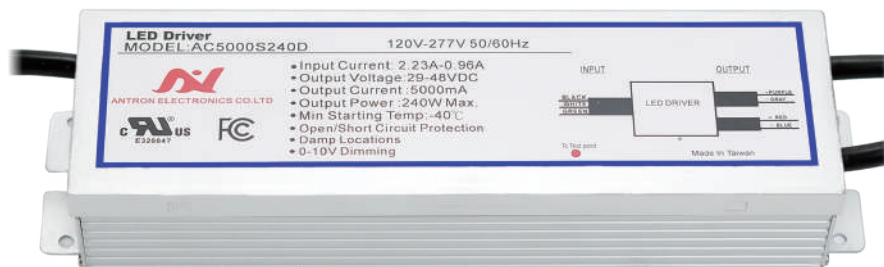

Product Feature

- Universal input voltage 120-277, 347, 120-347, 347-480 VAC
- PFC, Flicker Free, Isolated design
- 3-in-1 Dimming (PWM, 0-10V, Resistance)
- Suitable for UL dry and damp location
- Dimming down to 1%
- 2kV to 6kV surge protection
- 5 years warranty
- Isolated Dimming

产品特色

- 国际通用输入电压120-277, 347, 120-347, 347-480 VAC
- PFC、无闪烁、隔离设计
- 三合一调光功能 (PWM, 0-10V, 电阻)
- 适用于UL干燥、潮湿和多水的环境
- 调光最低到1%
- 2kV to 6kV 浪涌保护
- 五年质保
- 隔离调光

Product Specification

产品规格

Non-Dimmable (5-40W)

无调光 (5-40瓦)

Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
AC350S5M	120-277	5	350	9-14	83	76x46x28.5 / 107x36x29
AC500S5M	120-277	5	500	6-10	83	76x46x28.5 / 107x36x29
AC700S5M	120-277	5	700	5-7	83	76x46x28.5 / 107x36x29

Non-Dimmable (5-40W)

无调光 (5-40瓦)

Input		Output			Efficiency 效率 %	Dimension 尺寸 mm
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
AC1050S5M	120-277	5	1050	3-5	83	76x46x28.5 / 107x36x29
AC350S12M	120-277	12	350	20-34	85	76x46x28.5 / 107x36x29
AC500S12M	120-277	12	500	15-24	85	76x46x28.5 / 107x36x29
AC700S12M	120-277	12	700	11-17	85	76x46x28.5 / 107x36x29
AC1050S12M	120-277	12	1050	7-11	85	76x46x28.5 / 107x36x29
AC1050S40	120-277	40	1050	22-38	88	154x32x29

3-in-1 Dimmable (9-36W)

三合一调光 (9-36瓦)

Input		Output			Efficiency 效率 %	Dimension 尺寸 mm
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
AC450S9D	120-277	9	450	12-20	85	100x30x23 / 111x63x30 / 158x44x31
AC440S15D	120-277	15	440	19-34	85	111x78x32 / 111x63x30 / 158x44x31
AC1400S21D	120-277	21	1400	9-15	86	111x63x30 / 158x44x31
AC1150S23D	120-277	23	1150	12-20	86	111x63x30 / 158x44x31
AC620S25D	120-277	25	620	24-41	87	111x63x30 / 158x44x31
AC1050S25D	120-277	25	1050	14-24	87	111x63x30 / 158x44x31
AC1050S32D	120-277	32	1050	18-30	87	111x63x30 / 158x44x31
AC1800S36D	120-277	36	1800	12-20	87	111x63x30 / 158x44x31
3C450S9D	347	9	450	12-20	85	111x63x30 / 158x44x31
3C900S18D	347	18	900	12-20	86	111x63x30 / 158x44x31
3C1800S36D	347	36	1800	12-20	87	111x63x30 / 158x44x31

3-in-1 Dimmable (40-98W)

三合一调光 (40-98瓦)

Model Name 机种名称	Input		Output			Efficiency 效率 %	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V			
AC1400S40D	120-277	40	1400	17-29	88		133x63x30
AC1400S50D	120-277	50	1400	22-36	88		165x73x30
AC2500S60D	120-277	60	2500	14-24	88		241x32x29
AC2100S84D	120-277	84	2100	24-40	89		241x43x29.5
AC2450S98D	120-277	98	2450	24-40	89		241x43x29.5
3C1050S40D	347	40	1050	22-38	88		133x63x30
3C1400S50D	347	50	1400	22-36	88		165x73x30
3C1400S60D	347	60	1400	26-43	88		241x32x29
3C2100S84D	347	84	2100	24-40	89		241x43x29.5
3C2450S98D	347	98	2450	24-40	89		241x43x29.5
MC1100S46DL	120-347	46	1100	25-42	88		133x63x30
MC1500S63DL	120-347	63	1500	25-42	88		241x43x29.5
MC2100S84DL	120-347	84	2100	24-40	89		241x43x29.5
MC2200S93DL	120-347	93	2200	25-42	89		241x43x29.5
MC2450S98DL	120-347	98	2450	25-42	89		241x43x29.5

Note: The output current can be customized in factory
备注：输出电流可以由工厂客制调整



3-in-1 Dimmable (100-240W)
三合一调光 (100-240瓦)


Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
AC700S100D	120-277	100	700	85-143	89	241x43x29.5
AC2300S100D	120-277	100	2300	26-43	89	241x43x29.5
AC700S150D	120-277	150	700	128-214	90	241x61x40
AC4200S150D	120-277	150	4200	22-36	90	241x61x40
AC700S200D	120-277	200	700	171-285	90	241x66x40.5
AC4800S200D	120-277	200	4800	25-42	90	241x66x40.5
AC5000S240D	120-277	240	5000	29-48	90	241x66x40.5
3C700S100D	347	100	700	85-143	89	241x43x29.5
3C2300S100D	347	100	2300	26-43	89	241x43x29.5
3C700S150D	347	150	700	128-214	90	241x61x40
3C4200S150D	347	150	4200	22-36	90	241x61x40
3C700S200D	347	200	700	171-285	90	241x66x40.5
3C4800S200D	347	200	4800	25-42	90	241x66x40.5
3C5000S240D	347	240	5000	29-48	90	241x66x40.5
4C4200S150D	347-480	150	4200	22-36	90	241x61x40
4C4800S200D	347-480	200	4800	25-42	90	241x66x40.5

Note: The output current can be customized in factory
 备注：输出电流可以由工厂客制调整



Constant Voltage LED Driver

恒压LED电源驱动

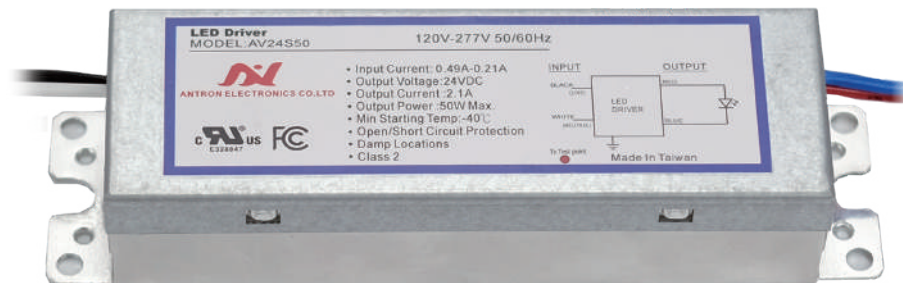

LED

Product Feature

- Universal input voltage 120-277, 347 VAC
- The LED driver output voltage is typically 12V/24V/36V/48V.
- PFC, flicker free and isolated design
- 3-in-1 Dimming (PWM, 0-10V, Resistance)
- Open/Short/Over-Voltage/Over Temp protection.
- 2kV to 6kV surge protection
- Suitable for UL dry and damp location
- 5 years warranty

产品特点

- 国际通用输入电压120-277, 347 VAC
- 输出电压包含了12V/24V/36V/48V
- 高功率因素、无频闪、隔离设计
- 三合一调光功能 (PWM, 0-10V, 电阻)
- 开路/短路/过压/过温保护
- 2kV to 6kV 浪涌保护
- 适用于UL干燥、潮湿和多水的环境
- 五年质保

Product Specification

产品规格

Non-Dimmable (12-20W)

无调光 (12-20瓦)

Input		Output			Efficiency 效率 %	Dimension 尺寸 mm
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 A	Voltage 输出电压 V		
AV_YY_S12M	120-277	12	1 0.5 0.3	12 24 36	84	107*36*29
AV_YY_S20M	120-277	20	1.67	12	84	107*36*29
3V_YY_S20M	347	20	1.67	12	84	107*36*29

3-in-1 Dimmable (12-60W)

三合一调光 (12-60瓦)

Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 A	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
AV_YY_S25D	120-277	25	2.08 1.04	12 24	80	158*44*31
AV_YY_S50	120-277	50	2.08	24	85	172*61*31 / 241*43*30.5
AV_YY_S60D	120-277	60	5 2.5 1.67 1.25	12 24 36 48	87	172*61*31 / 241*43*30.5
3V_YY_S60D	347	60	5 2.5 1.67 1.25	12 24 36 48	87	172*61*31 / 241*43*30.5

3-in-1 Dimmable (100-200W)

三合一调光 (100-200瓦)


Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 A	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
AV_YY_S100D	120-277	100	8 4.17 2.78 2.08	12 24 36 48	89	241*43*30.5 / 241*61*37
AV_YY_S150D	120-277	150	12.5 6.25 4.17 3.13	12 24 36 48	90	241*66*40.5
AV_YY_S200D	120-277	200	8.34 5.56 4.17	24 36 48	90	241*66*40.5
3V_YY_S100D	347	100	8 4.17 2.78 2.08	12 24 36 48	89	241*43*30.5 / 241*61*37
3V_YY_S150D	347	150	12.5 6.25 4.17 3.13	12 24 36 48	90	241*66*40.5
3V_YY_S200D	347	200	8.34 5.56 4.17	24 36 48	90	241*66*40.5

Note: The model name YY is output voltage which can be 12/24/36/48V depends on model
备注: 机种名称中的YY是输出电压 · 依据机种而填入12/24/36/48V



Triac Dimmable LED Driver

可控硅调光LED电源驱动

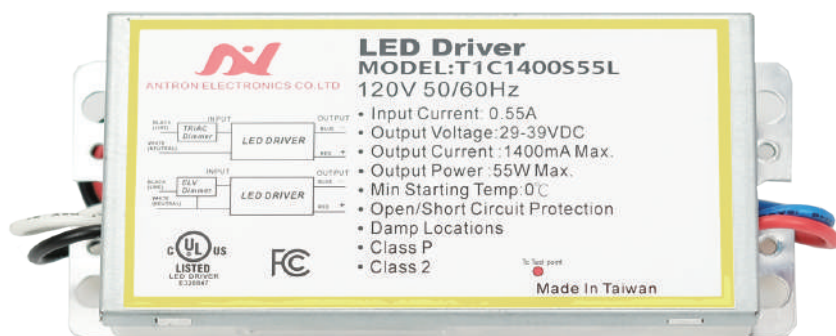

Product Feature

- input voltage 120 VAC
- PFC, Isolated design
- Low cost and high reliability
- Work with leading edge and trailing edge dimmers
- Open/Short/Over-Voltage/Over Temp protection.
- Suitable for UL dry and damp location
- 3 years warranty

产品特点

- 通用输入电压120 VAC
- 高功率因素、隔离设计
- 经济实惠且高可靠度
- 可搭配前切式和后切式调光器使用
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- 三年质保

Product Specification

产品规格

TRIAC or ELV Dimmable (10-55W)

前切式或后切式调光(10-55瓦)

Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
T1C700S10	120	10	700	10-15	84	98*37*26.5
T1C1050S15	120	15	1050	10-15	85	98*37*26.5
T1C350S18	120	18	350	36-51	86	98*37*26.5

TRIAC or ELV Dimmable (10-55W)

前切式或后切式调光(10-55瓦)

Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
T1C500S18	120	18	500	25-36	86	98*37*26.5
T1C350S25	120	25	350	50-71	87	98*37*26.5
T1C500S25	120	25	500	35-50	87	98*37*26.5
T1C700S25	120	25	700	25-36	87	98*37*26.5
T1C700S35	120	35	700	35-50	85	110*45*28
T1C1050S35	120	35	1050	24-35	85	110*45*28
T1C1400S35	120	35	1400	17-25	85	110*45*28
T1C1050S55L	120	55	1050	37-53	85	133*63*30
T1C1400S55L	120	55	1400	29-39	85	133*63*30

Constant voltage

Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
T1V12S30*	120	30	250-2500	12	85	126*105*32
T1V24S30*	120	30	125-1250	24	85	126*105*32

Note: The output current can be customized in factory
 备注：输出电流可以由工厂客制调整

CCT Tunable LED Driver

调光调色温LED电源驱动



Product Feature

- Universal input voltage 120-277, 120-347, 347 VAC
- PFC, flicker free and isolated design
- 3-in-1 dimming features (PWM, 1-10V, Resistor)
- DIP switch, TUYA APP through WiFi, and lead wires to connect with 2 dimmers
- Open/Short/Over-Voltage/Over Temp protection.
- Suitable for UL dry and damp location
- 5 years warranty
- 2kV to 6kV surge protection

产品特点

- 国际通用输入电压120-277, 120-347, 347 VAC
- 高功率因素、无频闪和隔离
- 三合一调光的设计(PWM, 0-10V 和电阻调光)
- 拨码开关、利用WiFi的涂鸦APP以及出线连接2个调光器
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- 五年质保
- 2kV到6kV的浪涌保护

Product Specification

产品规格

Adjust CCT and Brightness with APP

APP来调整色温和亮度

Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
AC700D25CBWFL	120-277	25	700	22-36	87	395*38*28.5

Adjust CCT and Brightness with 2 dimmers

双调光器来调整色温和亮度

Model Name 机种名称	Input	Output				
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
3C700D30CBL	120-277	30	700	27-45	85	241*43*30.5
3C1400D60CBL	120-277	60	1400	25-43	86	241*43*30.5
AC700D30CBL	347	30	700	27-45	85	241*43*30.5
AC1400D60CBL	347	60	1400	25-43	86	241*43*30.5
MC700D30CBL	120-347	30	700	27-45	85	241*43*30.5
MC1400D60CBL	120-347	60	1400	25-43	86	241*43*30.5

Adjust CCT and Brightness with DIP switch


拨码开关来调整色温和亮度

Model Name 机种名称	Input	Output				
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
AC1050S42DSCBLF	120-277	42	1050/900/700	25-42	87	206*87*34.5
AC1250S50DSCBLF	120-277	50	1250/1050/90	25-42	87	206*87*34.5
AC1500S60DSCBLF	120-277	60	1500/1250/1050	25-42	87	206*87*34.5
3C1050S42DSCBLF	347	42	1050/900/700	25-42	87	206*87*34.5
3C1250S50DSCBLF	347	50	1250/1050/900	25-42	87	206*87*34.5
3C1500S60DSCBLF	347	60	1500/1250/1050	25-42	87	206*87*34.5
MC1000S40DSCBLF	120-347	40	1000/900/700	25-42	87	206*87*34.5
MC1200S48DSCBLF	120-347	48	1200/1050/90	25-42	87	206*87*34.5
MC1500S60DSCBLF	120-347	60	1500/1250/1050	25-42	87	206*87*34.5

Note: The output current can be customized in factory
备注：输出电流可以由工厂客制调整

Programmable LED Driver

NFC可程式LED电源驱动

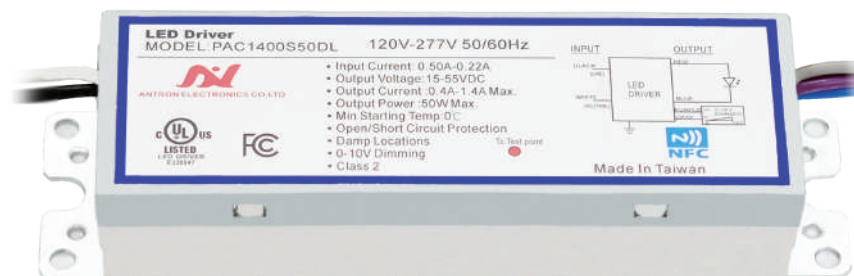

LED

Product Feature

- Universal input voltage 120-277, 347 VAC
- Programming output current step with 50mA precision
- PFC, flicker free and isolated design
- The lowest dimming levels are dim-to-1%, dim-to-10% or dim-to-off.
- Open/Short/Over-Voltage/Over Temp protection.
- 2kV to 6kV surge protection
- Suitable for UL dry and damp location
- 5 years warranty
- Isolated Dimming

产品特色

- 国际通用输入电压120-277, 347 VAC
- 输出电流编程精度为50mA
- 高功率因素、无频闪、隔离设计
- 最低调光程度可透过编程区分为 dim-to-1%, dim-to-10% 和 dim-to-off
- 开路/短路/过压/过温保护
- 2kV to 6kV 浪涌保护
- 适用于UL干燥、潮湿和多水的环境
- 五年质保
- 隔离调光

Product Specification

产品规格

3-in-1 Dimmable (25-60W)

三合一调光 (25-60瓦)

Input		Output				Dimension 尺寸 mm
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	
PAC1250S25DL	120-277	25	350-1250	15-55	80	158*44*31 / 133*63*30 / 314*34*27.5
PAC1250S30DL	120-277	30	350-1250	15-55	85	158*44*31 / 133*63*30 / 314*34*27.5
PAC1400S40DL	120-277	40	400-1400	15-55	85	158*44*31 / 133*63*30 / 314*34*27.5

3-in-1 Dimmable (25-60W)

三合一调光 (25-60瓦)

Model Name 机种名称	Input	Output			Efficiency 效率 %	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
PAC1400S50DL	120-277	50	400-1400	15-55	85	158*44*31 / 133*63*30 / 314*34*27.5
PAC1400S60DL	120-277	60	700-1400	27-55	87	314*34*27.5
P3C1250S25DL	347	25	350-1250	15-55	80	158*44*31 / 133*63*30 / 314*34*27.5
P3C1250S30DL	347	30	350-1250	15-55	85	158*44*31 / 133*63*30 / 314*34*27.5
P3C1400S40DL	347	40	400-1400	15-55	85	158*44*31 / 133*63*30 / 314*34*27.5
P3C1400S50DL	347	50	400-1400	15-55	85	158*44*31 / 133*63*30 / 314*34*27.5
P3C1400S60DL	347	60	700-1400	27-55	87	314*34*27.5

3-in-1 Dimmable (80-149W)

三合一调光 (80-149瓦)

Model Name 机种名称	Input	Output			Efficiency 效率 %	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
PAC2100S80DL	120-277	80	1050-2100	27-55	87	395*38*27.5
PAC2750S98DL	120-277	98	1400-2750	27-55	87	395*38*27.5
PAC1200S110D	120-277	110	600-1200	62-122	87	174*91*44
PAC3100S130D	120-277	130	2500-3100	25-42	87	174*91*44
PAC3300S149D	120-277	149	1400-3300	30-45	87	174*91*44
P3C2100S80DL	347	80	1050-2100	27-55	87	395*38*27.5
P3C2750S98DL	347	98	1400-2750	27-55	87	395*38*27.5
P3C1200S110D	347	110	600-1200	62-122	87	174*91*44
P3C3100S130D	347	130	2500-3100	25-42	87	174*91*44
P3C3300S149D	347	149	1400-3300	30-45	87	174*91*44

Current Selectable LED Driver



拨码电流LED电源驱动



LED

Product Feature

- Universal input voltage 120-277, 347, 120-347 VAC
- 3-in-1 Dimming (PWM, 0-10V, Resistance)
- PFC, flicker free and isolated design
- Adjust output current (power) by DIP switch
- Open/Short/Over-Voltage/Over Temp protection
- 2kV to 6kV surge protection
- Suitable for UL dry and damp location
- 5 years warranty
- Isolated Dimming

产品特点

- 国际通用输入电压120-277, 347V, 120-347 VAC
- 三合一调光功能 (PWM, 0-10V, 电阻)
- 高功率因素、无频闪、隔离设计
- 拨码开关来调整输出电流/功率
- 开路/短路/过压/过温保护
- 2kV to 6kV 浪涌保护
- 适用于UL干燥、潮湿和多水的环境
- 五年质保
- 隔离调光

Product Specification

产品规格

3-in-1 Dimmable (40-60W)
三合一调光 (40-60瓦)

Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
AC1050S42DL-D3	120-277	42	1050/700/500	24-40	87	133*63*30
AC1250S50DL-D3	120-277	50	1250/1050/700	24-40	87	165*73*30
AC1500S60DL-D3	120-277	60	1500/1250/900	24-40	88	241*43*30.5

3-in-1 Dimmable (40-60W)

三合一调光 (40-60瓦)

Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
3C1050S42DL-D3	347	42	1050/700/500	24-40	87	133*63*30
3C1250S50DL-D3	347	50	1250/1050/700	24-40	87	165*73*30
3C1500S60DL-D3	347	60	1500/1250/900	24-40	88	241*43*30.5
MC1000S40DL-D3	120-347	40	1000/700/500	24-40	87	133*63*30
MC1200S48DL-D3	120-347	48	1200/1050/700	24-40	87	165*73*30
MC1500S60DL-D3	120-347	60	1500/1250/700	24-40	88	241*43*30.5

3-in-1 Dimmable (72-150W)

三合一调光 (72-150瓦)

Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
AC2800S72D-D3	120-277	72	2800/2500/1800	16-26	88	395*38*28.5
AC700S75D-D3	120-277	75	700/550/350	64-107	88	395*38*28.5
AC2100S84D-D3	120-277	84	2100/1750/1400	24-40	88	241*61*37
AC1600S91D-D3	120-277	91	1600/1400/1050	34-56	88	241*61*37
AC2450S98D-D4	120-277	98	2450/2100/1750/1400	24-40	88	241*61*37
AC3000S150D-D3	120-277	150	3000/2000/1000	30-50	88	241*66*40.5
3C2800S72D-D3	347	72	2800/2500/1800	16-26	88	395*38*28.5
3C2100S84D-D3	347	84	2100/1750/1400	24-40	88	241*61*37
3C2450S98D-D4	347	98	2450/2100/1750/1400	24-40	88	241*61*37
3C3000S150D-D3	347	150	3000/2000/1000	30-50	88	241*66*40.5

Note: The output current can be customized in factory
备注：输出电流可以由工厂客制调整



Slim LED Driver

细长型LED电源驱动



LED

Product Feature

- input voltage 120-277, 347, 120-347 VAC
- 3-in-1 Dimming features (PWM, 1-10V, Resistor)
- PFC, flicker free and isolated design
- Adjust output current/wattage by an external resistor or potentiometer.
- Open/Short/Over-Voltage/Over Temp protection
- 2kV to 6kV surge protection
- Suitable for UL dry and damp location
- 5 years warranty

产品特点

- 通用输入电压120-277, 347V, 120-347 VAC
- 三合一调光的设计(PWM, 0-10V 和电阻调光)
- 高功率因素、无频闪、隔离设计
- 可透过外插电阻或可变电阻弹性化地调整
- 开路/短路/过压/过温保护
- 2kV to 6kV 浪涌保护
- 适用于UL干燥、潮湿和多水的环境
- 五年质保


Product Specification

产品规格

Input		Output			Efficiency 效率 %	Dimension 尺寸 mm
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
RAC1100S40DL	120-277	40	600-1100	25-42 / 27-55	88	303*30*22 / 314*34*27.5
RAC1500S54DL	120-277	54	900-1500	25-42 / 27-55	88	303*30*22 / 314*34*27.5
RAC2200S80DL	120-277	80	1400-2200	25-42 / 27-55	88	395*38*28.5
R3C1100S40DL	347	40	600-1100	25-42 / 27-55	88	303*30*22 / 314*34*27.5
R3C1500S54DL	347	54	900-1500	25-42 / 27-55	88	303*30*22 / 314*34*27.5
R3C2200S80DL	347	80	1400-2200	25-42 / 27-55	88	395*38*28.5
MC1100S46DL	120-347	46	600-1100	25-42	87	303*30*22 / 314*34*27.5
MC1500S63DL	120-347	63	1000-1500	25-42	87	303*30*22 / 314*34*27.5
MC2200S93DL	120-347	93	1500/2200	25-42	87	395*38*28.5

Waterproof LED Driver

防水型LED电源驱动

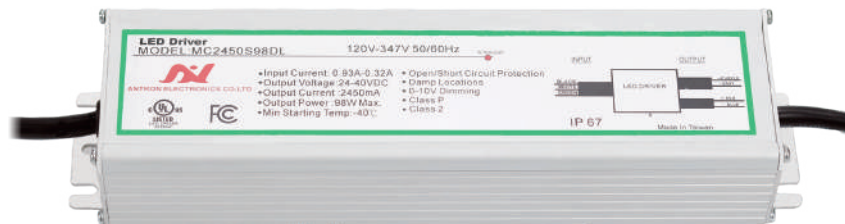

Product Feature

- Universal input voltage 120-277, 347, 120-347, 347-480 VAC
- PFC, flicker free and isolated design
- 3-in-1 dimming features (PWM, 1-10V, Resistor)
- Waterproof IP67 rated.
- Open/Short/Over-Voltage/Over Temp protection
- Suitable for UL dry and damp location.
- 2kV to 6kV surge protection
- 5 years warranty
- Isolated Dimming

产品特点

- 国际通用输入电压120-277, 347, 120-347, 347-480 VAC
- 高功率因素、无频闪和隔离
- 三合一调光的设计(PWM, 0-10V 和电阻调光)
- 防水防尘系数高达IP67
- 适用于UL干燥、潮湿和多水的环境
- 防水防尘系数高达IP67
- 2kV到6kV的浪涌保护
- 五年质保
- 隔离调光

Product Specification

产品规格

Constant Voltage (60-200W)

恒压 (60-200瓦)

Input		Output			Efficiency 效率 %	Dimension 尺寸 mm
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 A	Voltage 输出电压 V		
AV_YY_S60D	120-277	60	5 2.5 1.67 1.25	12 24 36 48	87	171*68*40.5 / 241*61.5*39
AV_YY_S100D	120-277	100	8 4.17 2.78 2.08	12 24 36 48	89	241*61.5*39
AV_YY_S150D	120-277	150	12.5 6.25 4.17 3.13	12 24 36 48	90	241*68*40.5
AV_YY_S200D	120-277	200	8.34 5.56 4.17	24 36 48	90	241*68*40.5
3V_YY_S60D	347	60	5 2.5 1.67 1.25	12 24 36 48	87	171*68*40.5 / 241*61.5*39
3V_YY_S100D	347	100	8 4.17 2.78 2.08	12 24 36 48	89	241*61.5*39
3V_YY_S150D	347	150	12.5 6.25 4.17 3.13	12 24 36 48	90	241*68*40.5
3V_YY_S200D	347	200	8.34 5.56 4.17	24 36 48	90	241*68*40.5

Note: The model name YY is output voltage which can be 12/24/36/48V depends on model

备注: 机种名称中的YY是输出电压, 依据机种而填入12/24/36/48V

Constant Current (40-240W)

恒流 (40-240瓦)

Model Name 机种名称	Input		Output			
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
AC1400S40D	120-277	40	1400	14-29	88	101*68*40.5
AC1400S50D	120-277	50	1400	22-36	88	171*68*40.5
AC2500S60D	120-277	60	2500	14-24	88	171*68*40.5
AC2100S84D	120-277	84	2100	24-40	89	241*61.5*39
AC2450S98D	120-277	98	2450	24-40	89	241*61.5*39
AC2300S100D	120-277	100	2300	26-43	89	241*68*40.5
AC4200S150D	120-277	150	4200	22-36	90	241*68*40.5
AC4800S200D	120-277	200	4800	25-42	90	241*68*40.5
AC5000S240D	120-277	240	5000	29-48	90	241*68*40.5
3C1050S40D	347	40	1050	22-38	88	101*68*40.5
3C1400S50D	347	50	1400	22-36	88	171*68*40.5
3C1400S60D	347	60	1400	26-43	88	171*68*40.5
3C2100S84D	347	84	2100	24-40	89	241*61.5*39
3C2450S98D	347	98	2450	24-40	89	241*61.5*39
3C2300S100D	347	100	2300	26-43	89	241*68*40.5
3C4200S150D	347	150	4200	22-36	90	241*68*40.5
3C4800S200D	347	200	4800	25-42	90	241*68*40.5
3C5000S240D	347	240	5000	29-48	90	241*68*40.5
MC1100S46DL	120-347	46	1100	25-42	88	101*68*40.5
MC1500S63DL	120-347	63	1500	25-42	88	171*68*40.5
MC2100S84DL	120-347	84	2100	24-40	89	241*61.5*39
MC2200S93DL	120-347	93	2200	25-42	89	241*61.5*39
MC2450S98DL	120-347	98	2450	25-42	89	241*61.5*39
4C4200S150D	347-480	150	4200	22-36	90	241*68*40.5
4C4800S200D	347-480	200	4800	25-42	90	241*68*40.5



Note: The output current can be customized in factory
 备注：输出电流可以由工厂客制调整

Junction Box LED Driver

接线盒LED电源驱动



Product Feature

- Universal input voltage 120-277, 120-347, 347VAC
- 3-in-1 Dimming (PWM, 0-10V, Resistance)
- PFC, flicker free and isolated design
- Embedded junction box design
- Open/Short/Over-Voltage/Over Temp protection
- 2kV to 6kV surge protection
- Suitable for UL dry and damp location
- 5 years warranty

产品特点

- 国际通用输入电压120-277, 120-347, 347VAC
- 三合一调光功能 (PWM, 0-10V, 电阻)
- PFC、无频闪、隔离设计
- 嵌入式接线盒设计
- 开路/短路/过压/过温保护
- 2kV to 6kV 浪涌保护
- 适用于UL干燥、潮湿和多水的环境
- 五年质保

Product Specification

产品规格

Constant Voltage (60-100W)

恒壓 (60-100瓦)

Input		Output				
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 A	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
AV_YY_S60D	120-277	60	5 2.5 1.67 1.25	12 24 36 48	88	361*43*30.5
AV_YY_S100D	120-277	100	4.17 2.78 2.08	24 36 48	88	361*43*30.5

Constant Current (40-60W)

恒流 (40-60瓦)


Model Name 机种名称	Input	Output			Efficiency 效率 %	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
AC1050S42DL	120-277	42	1050	25-42	87	206x87x34.5
AC1250S50DL	120-277	50	1250	25-42	87	206x87x34.5
AC1500S60DL	120-277	60	1500	25-42	87	206x87x34.5
3C1050S42DL	347	42	1050	25-42	87	206x87x34.5
3C1250S50DL	347	50	1250	25-42	87	206x87x34.5
3C1500S60DL	347	60	1500	25-42	87	206x87x34.5
MC1000S40DL	120-347	40	1000	25-42	87	206x87x34.5
MC1200S48DL	120-347	48	1200	25-42	87	206x87x34.5
MC1500S60DL	120-347	60	1500	25-42	87	206x87x34.5

Note: The output current can be customized in factory
备注：输出电流可以由工厂客制调整



Microwave Occupancy LED Driver

微波感应LED电源驱动

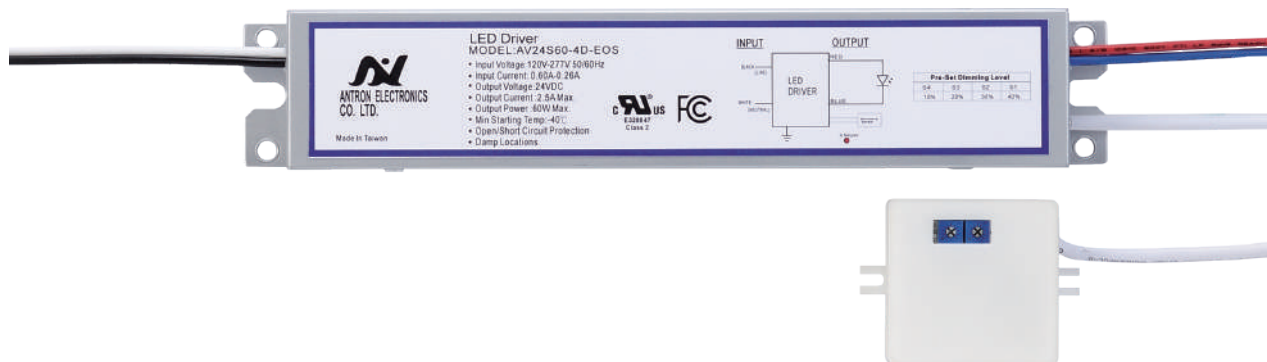

Product Feature

- Universal input voltage 120-277 VAC
- PFC, flicker free and isolated design
- 3-in-1 dimming features (PWM, 1-10V, Resistor)
- The sensitivity and time delay of the sensor is highly flexible.
- Open/Short/Over-Voltage/Over Temp protection
- Suitable for UL dry and damp location.
- 2kV to 6kV surge protection
- 5 years warranty

产品特点

- 国际通用输入电压 120-277 VAC
- 高功率因素、无频闪和隔离
- 三合一调光的设计(PWM, 0-10V 和电阻调光)
- 感应器之灵敏度和延迟时间皆拥有高弹性化的特性
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- 2kV到6kV的浪涌保护
- 五年质保

Product Specification

产品规格


Model Name 机种名称	Input	Output			Efficiency 效率 %	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V		
AV12S60D-EOS	120-277	60	5000	12	89	325*34*29 / 241*43*30.5
AV24S60D-EOS	120-277	60	2500	24	89	325*34*29 / 241*43*30.5
PAC1400S60DL-EOS	120-277	60	700-1400	27-55	88	325*34*29
AV24S100D-EOS	120-277	100	4100	24	89	241*61*37

Note: The output current can be customized in factory

备注：输出电流可以由工厂客制调整

Dual Channel LED Driver

双通道输出LED电源驱动

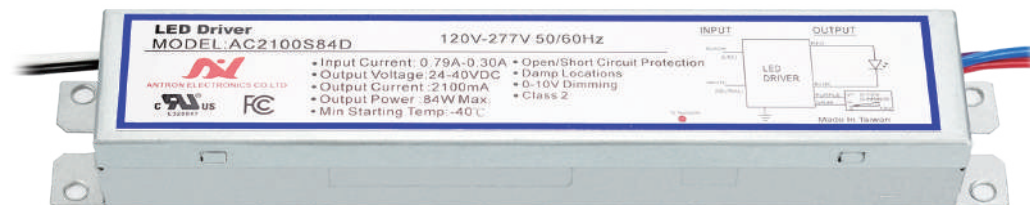

Product Feature

- Universal input voltage 120-277, 347 VAC
- 3-in-1 Dimming (PWM, 0-10V, Resistance)
- PFC, flicker free and isolated design
- 2 individual output design
- Open/Short/Over-Voltage/Over Temp protection
- 2kV to 6kV surge protection
- Suitable for UL dry and damp location
- 5 years warranty

产品特点

- 国际通用输入电压1120-277, 347 VAC
- 三合一调光功能 (PWM, 0-10V, 电阻)
- 高功率因素、无频闪和隔离
- 两个独立的输出通道设计
- 开路/短路/过压/过温保护
- 2kV to 6kV 浪涌保护
- 适用于UL干燥、潮湿和多水的环境
- 五年质保


Product Specification

产品规格

Model Name 机种名称	Input		Output				Efficiency 效率 %	Dimension 尺寸 mm
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Channel 输出通道	Power Per Channel 单通道输出功率		
AC350D12	120-277	24	350	20-34	2	12	82	241*32*29 / 241*43*30.5
AC450D15D	120-277	30	450	20-33	2	15	82	241*43*30.5
AC350D18D	120-277	36	350	31-51	2	18	83	172*61*31
AC700D22D	120-277	44	700	19-31	2	22	83	325*34*29
3C350D12	347	24	350	20-34	2	12	82	241*32*29 / 241*43*30.5
3C450D15D	347	30	450	20-33	2	15	82	241*43*30.5

Multiple Channel LED Driver

多通道输出LED电源驱动

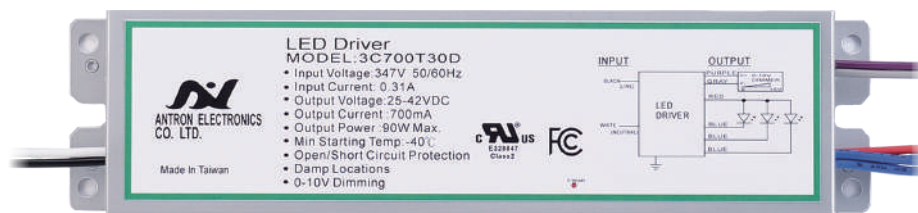

Product Feature

- Universal input voltage 120-277, 120-347, 347 VAC
- 3-in-1 Dimming features (PWM, 1-10V, Resistor)
- PFC, flicker free and isolated design
- 3 or 4 individual outputs design
- Open/Short/Over-Voltage/Over Temp protection
- 2kV to 6kV surge protection
- Suitable for UL dry and damp location
- 5 years warranty

产品特色

- 国际通用输入电压120-277, 347V, 120-347 VAC
- 三合一调光的设计(PWM, 0-10V 和电阻调光)
- 高功率因素、无频闪、隔离设计
- 3或4个独立的输出通道设计
- 开路/短路/过压/过温保护
- 2kV to 6kV 浪涌保护
- 适用于UL干燥、潮湿和多水的环境
- 五年质保

Product Specification

产品规格

3 or 4 Independent Channels (60-160W)

3或4通道设计 (60-160瓦)

Input		Output						
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Channel 输出通道	Power Per Channel 单通道输出功率	Efficiency 效率 %	Dimension 尺寸 mm
AC700T30D	120-277	90	700	25-42	3	30	84	241*61*37
AC1050T48D	120-277	144	1050	27-45	3	48	84	241*95*46
AC450Q15D	120-277	60	450	20-33	4	15	84	241*61*37
AC700Q25D	120-277	100	700	21-36	4	25	84	241*95*46
AC1350Q33D	120-277	132	1350	15-25	4	33	85	241*95*46
AC1050Q37D	120-277	148	1050	21-35	4	37	85	241*95*46
AC700Q40D	120-277	160	700	34-57	4	40	85	241*95*46
3C700T30D	347	90	700	25-42	3	30	84	241*61*37
3C450Q15D	347	60	450	20-33	4	15	84	241*61*37
3C1350Q33D	347	132	1350	15-25	4	33	85	241*95*46

UFO High Bay LED Driver

工矿灯LED电源驱动



LED

Product Feature

- Universal input voltage 120-277, 120-347, 347 VAC
- 3-in-1 Dimming features (PWM, 0-10V, Resistance)
- PFC, flicker free and isolated design
- High efficiency up to 90%
- Open/Short/Over-Voltage/Over Temp protection
- 2kV to 6kV surge protection
- Suitable for UL dry and damp location
- 5 years warranty

产品特色

- 国际通用输入电压120-277, 347V, 120-347 VAC
- 三合一调光的设计(PWM, 0-10V 和电阻调光)
- 高功率因素、无频闪、隔离设计
- 效率高达90%
- 开路/短路/过压/过温保护
- 2kV to 6kV 浪涌保护
- 适用于UL干燥、潮湿和多水的环境
- 五年质保

Product Specification


产品规格

Model Name 机种名称	Input	Output				
	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 mA	Voltage 输出电压 V	Efficiency 效率 %	Dimension 尺寸 mm
UFO-AC_YYYY_S100DL	120-277	100	1600~2800	22-60	89	Ø 132*72
UFO-AC_YYYY_S160DL	120-277	160	2600~4500	22-60	90	Ø 152*72
UFO-AC_YYYY_S200DL	120-277	200	3400~5600	22-60	90	Ø 152*72
UFO-AC_YYYY_S240DL	120-277	240	4000~6700	22-60	90	182*72
UFO-3C_YYYY_S100DL	347	100	1600~2800	22-60	89	132*72
UFO-3C_YYYY_S160DL	347	160	2600~4500	22-60	90	152*72
UFO-3C_YYYY_S200DL	347	200	3400~5600	22-60	90	152*72
UFO-3C_YYYY_S240DL	347	240	4000~6700	22-60	90	182*72

Note: The model name YYYY is output current which can be customized in factory
注意: 機種名稱中的 YYYY 是輸出電流, 可以由工廠客製調整

Fluorescent Ballast

萤光灯电子安定器

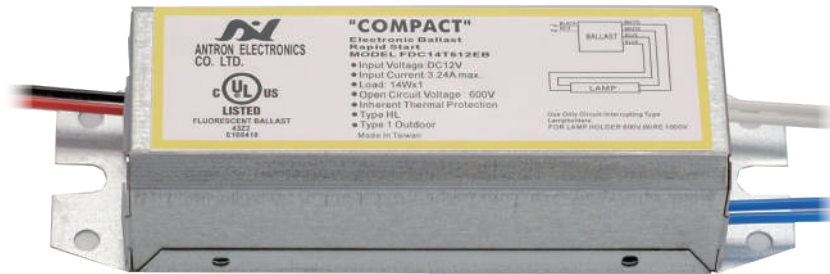

Product Feature

- Universal input voltage 120-277, 347, 480 VAC
- Work with T5, T8, T10, T12, 2D, CFL, BIAx-PLL and circular lamp
- Instant start, modified rapid start, program start and rapid start mechanism
- Open/Short/Over-Voltage/Over Temp protection
- Suitable for UL dry and damp location
- 5 years warranty

产品特色

- 国际通用输入电压120-277, 347, 480 VAC
- 适用于T5, T8, T10, T12, 2D, CFL, BIAx-PLL和circular灯
- 瞬时启动、修正型快速启动、程式启动和快速启动的启动机制
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- 五年质保

Product Series

产品系列



T5 Series





T8 Series




T10.T12 Series

Fluorescent Ballast Product Series

螢光灯电子安定器产品系列

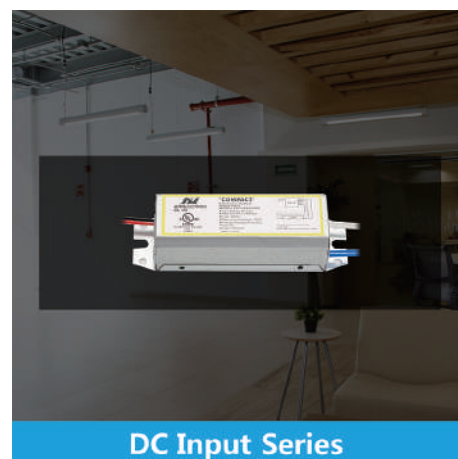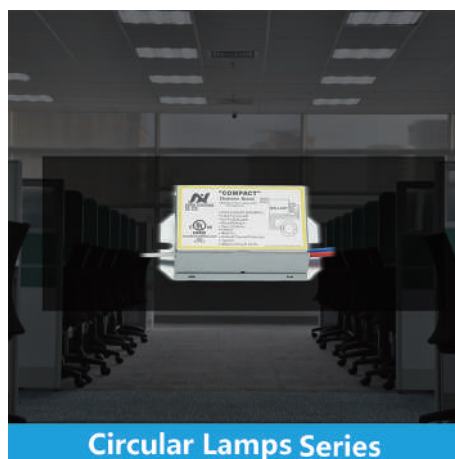

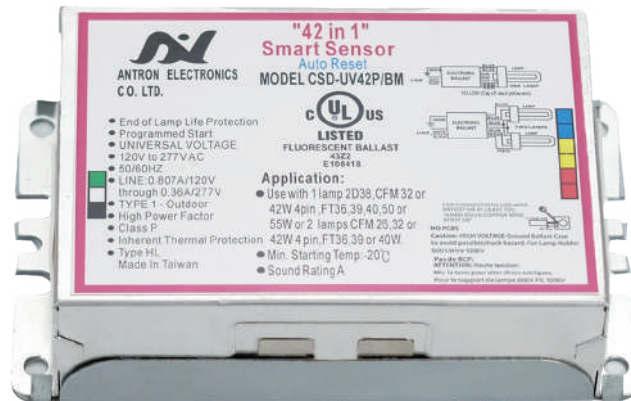

Product Feature

- Universal input voltage 120-277 VAC
- Compatible with most popular UV lamps
- Program start design extend the life span of the lamp
- Lead wire and terminal block design
- Open/Short/Over-Voltage/Over Temp protection
- Suitable for UL dry and damp location
- 5 years warranty

产品特点

- 国际通用输入电压120-277 VAC
- 兼容大部分市场上热门的UV灯管
- 程式启动有效延长灯管的寿命
- 拥有出线以及端子台两种设计可供选择
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- 五年质保

Emergency Lighting Inverter

应急照明逆变器



Product Feature

- Universal input voltage 120-277 VAC
- At least 90 minutes in emergency mode
- Auto dimming 0-10V
- Auto Select Output Voltage (120 or 277 VAC)
- UL listed and CEC title 20 approval
- Open/Short/Over-Voltage/Over Temp.
- Suitable for UL dry and damp locaion
- 5 years warranty

产品特色

- 国际通用输入电压 120-277 VAC
- 应急模式可持续至少90分钟
- 自动调光0-10V
- 自动选择输出电压 (120 或 277 VAC)
- UL listed 和 CEC title 20 认证通过
- 开路/短路/过压/过温保护
- 适用于UL干燥、潮湿和多水的环境
- 五年质保

Product Specification

产品规格

	Input	Output			
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Voltage 输出电压 VAC	Metal Conduit 金属导管	Dimension 尺寸 mm
EMLEDS50-AC120/277-12.8CHP-FTS 25W	120-277	25	120/277	Single	525*57*52
EMLEDS50-AC120/277-12.8CHP-FTS 35W	120-277	35	120/277	Single	525*57*52
EMLEDS50-AC120/277-12.8CHP-FTS	120-277	50	120/277	Single	525*57*52
EMLEDS100-AC120/277-25.6CHP-FTS	120-277	100	120/277	Single	495*84*56

氮化镓迷你电源供应器



Product Feature

- Universal input voltage 100-240 VAC
- The power supply output voltage is typically 12V/24V/36V/48V.
- PFC, flicker free and isolated design
- High power density with small form factor
- Open/Short/Over-Voltage/Over Temp.
- 2kV to 6kV surge protection
- PSU comes completely without a fan
- 5 years warranty

产品特点

- 国际通用输入电压100-240 VAC
- 输出电压包含了 12V/24V/36V/48V
- 高功率因素、无频闪、隔离设计
- 高功率密度和小外形尺寸
- 开路/短路/过压/过温保护
- 2kV到6kV的浪涌保护
- 无风扇设计
- 五年质保

Product Specification

产品规格

Input		Output				Remark 备注	Dimension 尺寸 mm
Model Name 机种名称	Voltage 输入电压 VAC	Power 输出功率 W	Current 输出电流 A	Voltage 输出电压 V	Efficiency 效率		
JV_YY_S35M	100-240	35	2.92 1.46 0.97 0.73	12 24 36 48	88	Bare board, Lead wire	86*41*20
JV_YY_S75M	100-240	75	6.25 3.13 12.08 1.56	12 24 36 48	88	Bare board, Lead wire	86*41*20
JV_YY_S150M	100-240	150	12.5 6.25 4.17 3.13	12 24 36 48	95	Terminal block	114*82*36
JV_YY_S350M	100-240	350	29.17 14.58 9.72 7.29	12 24 36 48	95	Terminal block	183*82*36



Antron Electronics Co.,Ltd 安雄電子股份有限公司

Jiali Headquarter 佳里總部

台南市佳里區海澄里萊芋寮17-14號

No.17-14 Lai-Kan Liaw, Hi-Chien Li, Jiali District,
Tainan City, Taiwan 722012

TEL: 886-6-726-3906/7

FAX: 886-6-726-3908

E-mail: info@antron.com.tw

Shalun Branch 沙崙分部 (綠能科技示範場域)

台南市歸仁區高發二路360號B棟418室

Rm. 418, No. 360, Gaofa 2nd Rd., Guiren Dist.,
Tainan City, Taiwan 711010

TEL: 886-6-7266823 #181

TEL: 886-6-7266823 #181

