




| | |
|------------------------|--|
| Model Name | MC2200S93DL |
| Output Mode | Constant Current |
| Input Voltage | 120-347 Vac |
| Input Frequency | 50/60 Hz |
| Dimming | 3 in 1 (PWM,1-10V,Resistance) 1-100% Dimming |
| Surge Rating | 2KV |
| Warranty | 5 Years TC \leq 75°C 3 Years 75°C \leq TC \leq 90°C |

Product Specification




| Output Power (W) | Output Voltage (V) | Output Current (A) | Start Temp. (°F/°C) | Tcase Temp. (°F/°C) | Input Current (A) | Input Power (W) | Inrush Current (A) | THD (%) | Power Factor | Efficiency (%) |
|------------------|--------------------|--------------------|---------------------|---------------------|-----------------------|-----------------|--------------------|---------|--------------|----------------|
| Max. 93 | 25-42 | 1.5-2.2 | Min. -40/-40 | Max. 194/90 | 0.9@120V 0.32@347V | 107 | Max. 25A | Max. 20 | Min. 0.9 | Typ. 87 |

Wire Diagram

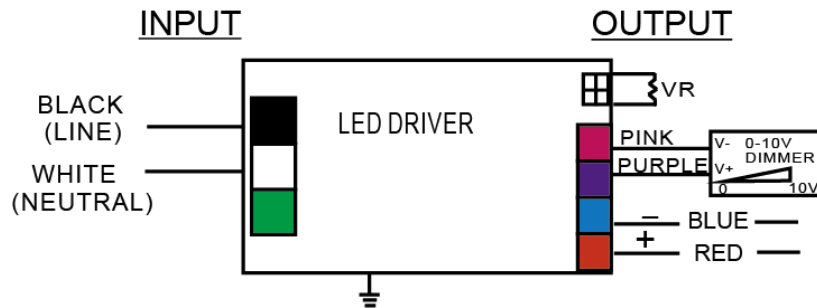

Maximum wiring distance (at full load) is 18AWG/18Feet
LED case should be grounded

Enclosure

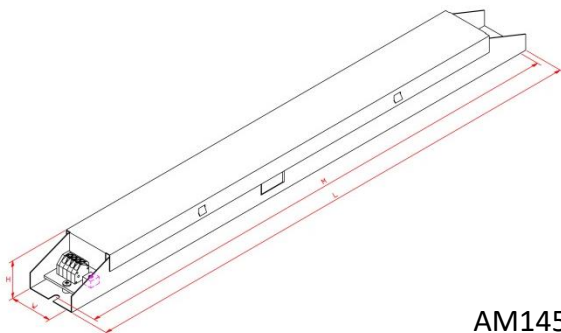

AM145

| Enclosure | Inch | Cm |
|-------------|-------|------|
| Length(L) | 15.5 | 39.5 |
| Width(W) | 1.49 | 3.8 |
| Height(H) | 1.08 | 2.75 |
| Mounting(M) | 15.23 | 38.7 |