



Antron Electronics Co.,LTD
安雄電子股份有限公司

T5 Program Start Ballast





Model Name	TSD-UV21T5MS
Ballast Type	Electronic
Starting Method	Program Start
Lamp connection	Series
Input Voltage	120-277V
Input Frequency	50/60Hz
Warranty	5 Years $TC \leq 75^{\circ}C$ 3 Years $75^{\circ}C \leq TC \leq 90^{\circ}C$

Safety & Performance



- One or Two lamps
- UL/cUL Listed
- UL Type 1 Outdoor
- FCC part 18 Class A
- Sound Rated Class A
- Class P Thermally Protected
- High Power Factor
- Surge Protected
- Auto Restart
- No PCBs
- Type HL


Wire Diagram

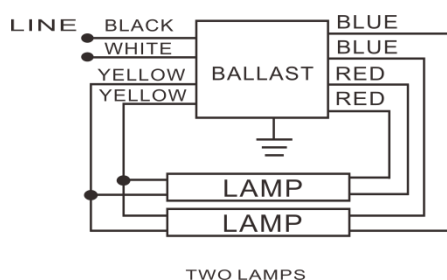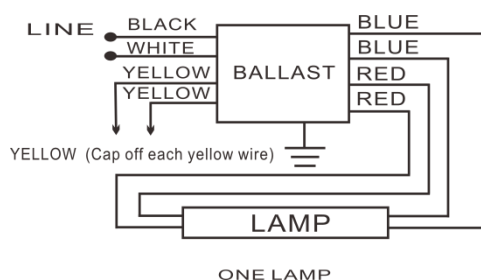

Lead Length	Inch	Cm
Black	18.8	48
White	18.8	48
Blue	30.9	78.5
Red	30.9	78.5
Yellow	46.4	118

Maximum Wiring Distance (at full load) is 18AWG/18Feet
Case must be grounded

Enclosure

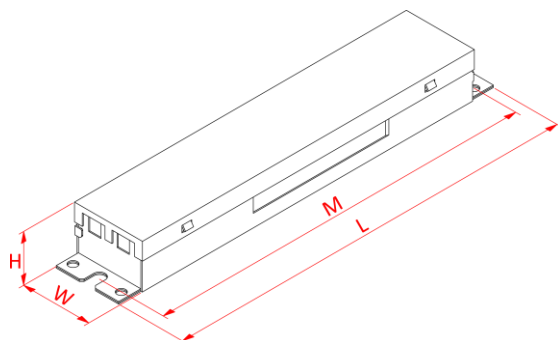

AM103

Enclosure	Inch	Cm
Length(L)	9.5	24.1
Width(W)	1.7	4.3
Height(H)	1.2	3.05
Mounting(M)	8.9	22.6



Electrical Specification with Different Lamps

Lamp Type	No. of Lamps	Input Voltage (V)	Rated Lamp Watts	Start Temp Min. (F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	THD Max. (%)	Power Factor	Lamp Current Crest Factor Max.	BEF
21W T5	2	120	21	-22/-30	0.41	47	0.90	10	0.99	1.7	1.9
		230			0.23			10	0.99		
		277			0.21			15	0.98		
	1	120			0.28	33	0.93	10	0.99		2.8
		230			0.15			10	0.98		
		277			0.12			15	0.98		
14W T5	2	120	14	-22/-30	0.20	24	0.95	10	0.99	1.7	4.0
		230			0.11			15	0.98		
		277			0.09			20	0.98		
	1	120			0.15	17	0.97	10	0.99		5.7
		230			0.08			15	0.98		
		277			0.06			20	0.97		