



Antron Electronics Co.,LTD
安雄電子股份有限公司

Constant Current Emergency LED Pack



Model Name EMLEDS28-80130-9.6CHXNB

Output Model Constant Current

Input Voltage 120-277 Vac

Input Frequency 50/60 Hz

Dimming N/A

Surge Rating 3KV


Warranty 5 Years TC $\leq 60^{\circ}\text{C}$
3 Years TC $\leq 70^{\circ}\text{C}$

Product Specification



Output Power (W)	Output Voltage (V)	Output Current (mA)	Operating Duration Time	Operating Temp. (C)	Battery Voltage (V)	Battery Charge Current (mA)	Battery Charge Time	Input Power	Input Current (mA)
Max. 28.6	80-130	220	Min. 90min	0-55	9.6	Max. 210	Min. 48Hrs	Max. 5	Max. 70


Wire Diagram

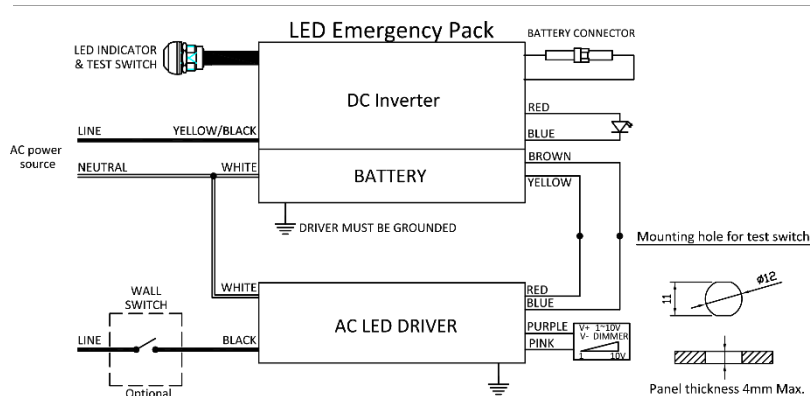

Maximum Wiring Distance (at full load) is 18AWG/18Feet

Lead Length	Inch	Cm
White	22.04	56
Yellow/Black	19.29	49
Red	25.98	66
Blue	25.98	66
Yellow	32.28	82
Brown	32.28	82
Battery Connector	33.07	84
Test Switch	25	63.5
LED Indicator	6	15.24

Enclosure

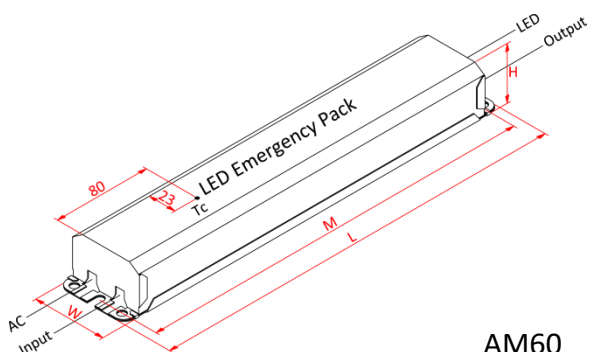

AM60

Enclosure	Inch	Cm
Length(L)	13.3	33.8
Width(W)	2.44	6.2
Height(H)	1.49	3.8
Mounting(M)	12.68	32.2