



Antron Electronics Co.,LTD  
安雄電子股份有限公司

# Constant Current LED Driver




|                 |                                                                                 |
|-----------------|---------------------------------------------------------------------------------|
| Model Name      | AC1400S21D                                                                      |
| Output Mode     | Constant Current                                                                |
| Input Voltage   | 120-277 Vac                                                                     |
| Input Frequency | 50/60 Hz                                                                        |
| Dimming         | 3 in 1 ( PWM, 1-10V, Resistance)<br>Dimming: 1-100%                             |
| Surge Rating    | 2KV                                                                             |
| Warranty        | 5 Years $TC \leq 75^{\circ}C$<br>3 Years $75^{\circ}C \leq TC \leq 90^{\circ}C$ |

## Product Specification



| Output Power (W) | Output Voltage (V) | Output Current (A) | Start Temp. ( $^{\circ}F/^{\circ}C$ ) | Tcase Temp. ( $^{\circ}F/^{\circ}C$ ) | Input Current (A)      | Input Power (W) | Inrush Current (A) | THD (%) | Power Factor | Efficiency (%) |
|------------------|--------------------|--------------------|---------------------------------------|---------------------------------------|------------------------|-----------------|--------------------|---------|--------------|----------------|
| Max. 21          | 9-15               | 1.4                | Min -40/-40                           | Max. 194/90                           | 0.22@120V<br>0.11@277V | 24              | Max. 20            | Max. 20 | Min. 0.9     | Typ. 86        |

## Wire Diagram

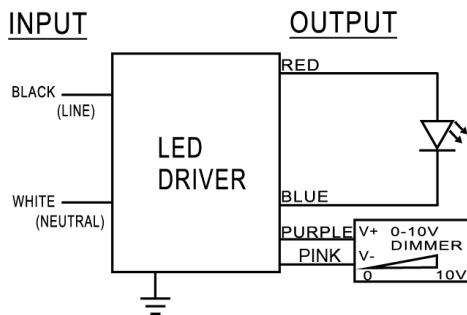


Maximum Wiring Distance (at full load) is 18AWG/18Feet

LED case should be grounded

| Lead Length | Inch | Cm   |
|-------------|------|------|
| Black       | 6    | 15.2 |
| White       | 6    | 15.2 |
| Green       | NA   | NA   |
| Red         | 6    | 15.2 |
| Blue        | 6    | 15.2 |
| Purple      | 7.1  | 18   |
| Pink        | 7.1  | 18   |

## Enclosure

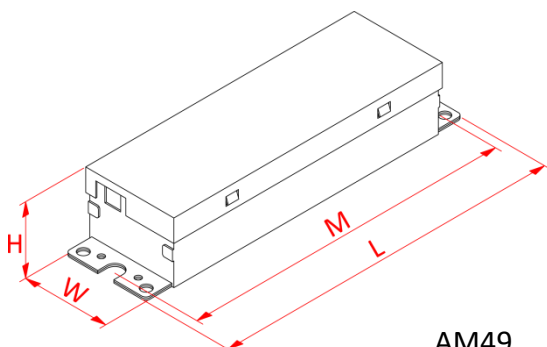

AM49

| Enclosure   | Inch | Cm   |
|-------------|------|------|
| Length(L)   | 6.22 | 15.8 |
| Width(W)    | 1.73 | 4.4  |
| Height(H)   | 1.22 | 3.1  |
| Mounting(M) | 5.87 | 14.9 |